


Installation Guidelines





NOVADISPLAY®
INNOVATIVE DISPLAY SOLUTIONS

1.5mm Cable Display Systems





800.753.9688 • www.novadisplay.com

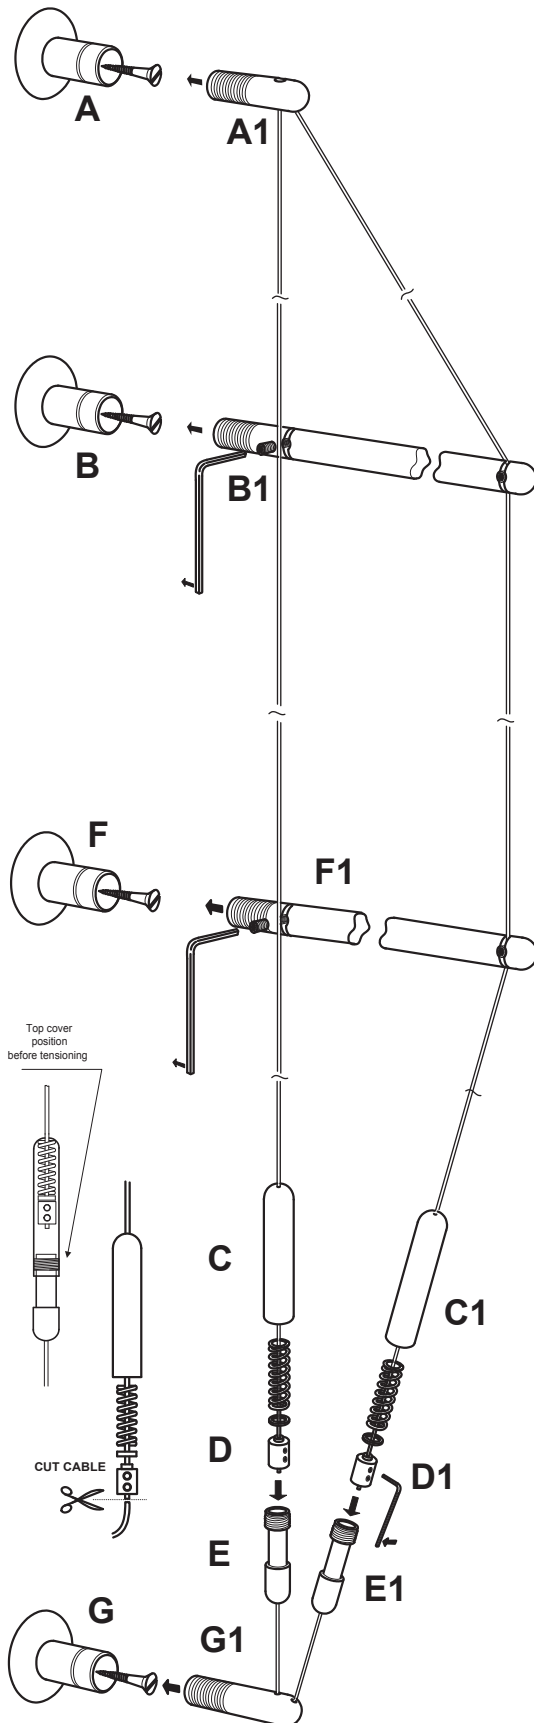

INSTALLATION TIPS



***** DO NOT INSTALL INTO PLASTERBOARD (DRYWALL) CEILINGS OR WALLS IF YOUR APPLICATION INCLUDES GLASS SHELVING OR OTHER HEAVY ITEMS.**

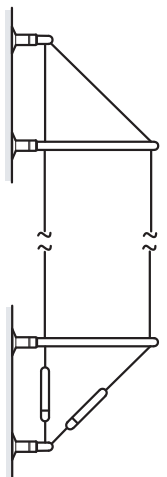

Wall to Wall (C2WW-15/30) Cable Installation

IMPORTANT: It is essential to check that the top ceiling fixings are strong enough to take the weight of the items being displayed, while allowing for the tension in the cables.

- 1) Select the upper height to which the cable is to start. Affix base fitting (**A-A1**) to wall using a suitable fixing for the wall type:
 - for wooden walls use a wood screw.
 - for a cavity wall use a spring toggle bolt.
 - for a solid wall use a rawl plug and screw.
- 2) Attach the wall bracket (**B-B1**) to the wall at a respective distance from the top fixing (**A**) to form a regular triangle as shown in the diagram below.
- 3) Loosen the set screws on the wall bracket (**B1**) to slacken the front and back cables.
- 4) Using a plumb-line, descend from (**A**), and affix fittings (**G-G1**) to wall using appropriate type of fixing.
- 5) Repeat step (2 & 3) for mounting the wall bracket (**F-F1**).
- 6) Separate the two sections of parts (**C-C1**) and (**E-E1**), and loosen the grub screws in the small brass pieces (**D-D1**), using the Allen key provided, and slide fittings up the cable to the desired length. (Do not remove from cable).
- 7) Having selected the required length, tighten the brass fittings, and cut off the excess cable.
- 8) Re-connect the two sections (**C-C1**) and (**E-E1**), and tighten to adjust tension.
- 9) Tighten set screws on the wall bracket (**B-B1**) & (**F-F1**) to fix the front and back cables in place.

NOTE: It is important to check the strength of the top fixing(s). NOVADISPLAY® takes no responsibility for incorrect installation. This responsibility rests with the installer.

Cables are not supplied with fixing screws.