

ONLINE CATALOG

1.5mm (1/16") Dia. Cable Display Systems

Features & Components




CONTACT INFORMATION

- To Order Products, Check Status of Your Order or Track Your Package... call toll free **800-753-9688**
- Send Your Inquires, Questions or Comments to **info@novadisplay.com**
(For assistance with general questions or actual display projects, please fax or e-mail us a short description and a graphical attachment. For best results, please send us a rough sketch or a project lay-out with dimensions and any special details. Using your drawing, we will generate a quote and specification sheet for the parts that lists the pricing, availability, delivery time, etc. You will receive a copy for review before ordering)
- For more information on our products and services, including pricing, technical information, and installation instructions visit our website at **www.novadisplay.com**
- You are also invited to visit our Online Store at **www.store.novadisplay.com**, where you will find various concept ideas and a comprehensive range of standard "Display Kits".

Cable Display Systems

1.5mm & 3.0mm Cables - Features & Benefits

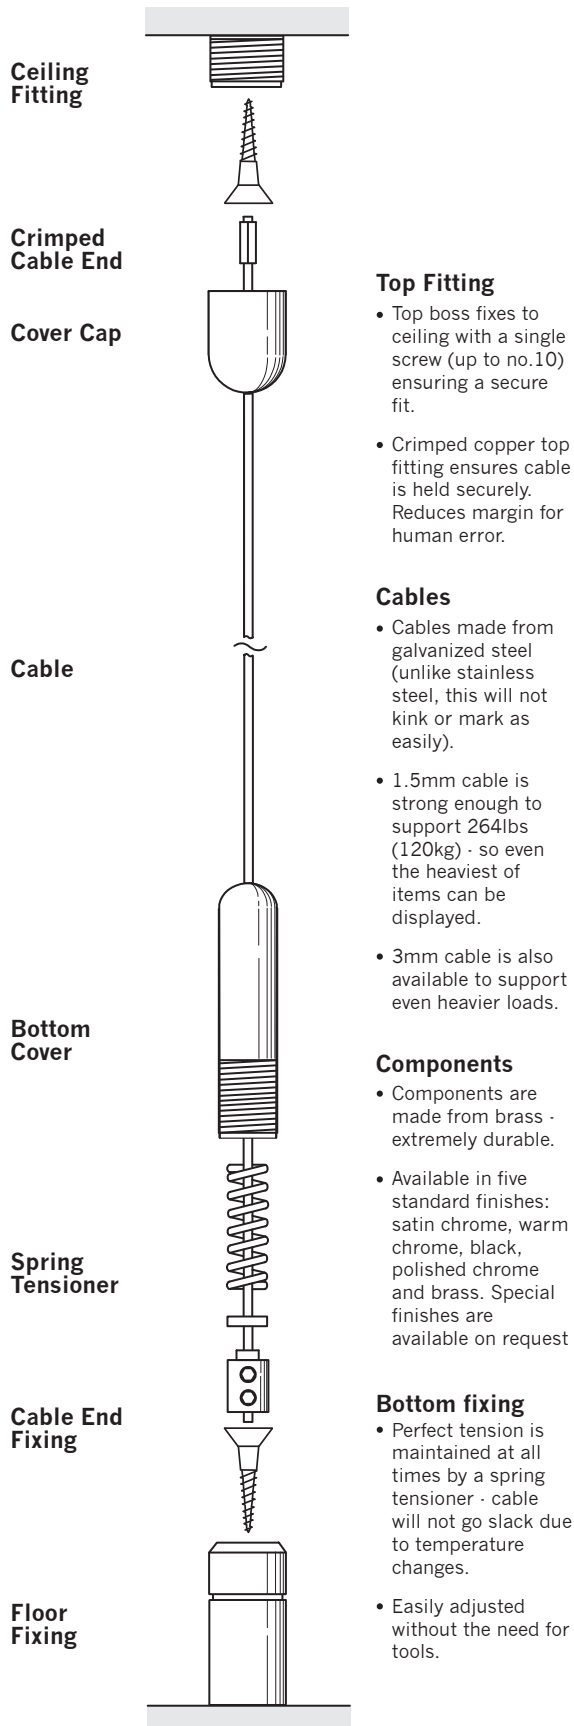

Top Fitting

- Top boss fixes to ceiling with a single screw (up to no.10) ensuring a secure fit.
- Crimped copper top fitting ensures cable is held securely. Reduces margin for human error.

Cables

- Cables made from galvanized steel (unlike stainless steel, this will not kink or mark as easily).
- 1.5mm cable is strong enough to support 264lbs (120kg) - so even the heaviest of items can be displayed.
- 3mm cable is also available to support even heavier loads.

Components

- Components are made from brass - extremely durable.
- Available in five standard finishes: satin chrome, warm chrome, black, polished chrome and brass. Special finishes are available on request

Bottom fixing

- Perfect tension is maintained at all times by a spring tensioner - cable will not go slack due to temperature changes.
- Easily adjusted without the need for tools.



FEATURES & BENEFITS

- Choose from 1.5mm diameter cables on pages 3-14 or 3mm diameter cables on pages 15-18.
- Designed and manufactured to the highest possible standards of quality.
- 5 year guarantee on all metal components.
- Extensive range of components and accessories ensure complete design flexibility.
- Low voltage lighting can be fully integrated onto both 1.5mm or 3.0mm cable.
- Stylish yet discreet design.
- Easy to install.



Designed to create stylish interior displays by incorporating posters, signage, banners, product shelving, artwork, leaflet dispensers, low-voltage lighting, and many other promotional materials. Extensive range of fittings ensure complete design flexibility, enabling you to create an instant presentation...



■ PRODUCT INFO:

For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

■ ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.

Cable Display Systems

1.5mm Cables & Fixings

CABLE WITH CEILING TO FLOOR FIXINGS Supplied with 4M (13' 1-1/2") Long Cable

- The basic kit for fixing between ceiling & floor.
- Includes Spring Tensioner, Top and Bottom Fixings.

Length: 4m (13' 1-1/2"), Top Fixing: 16mm (5/8") Diameter, Bottom Fixing: 15mm (19/32") Diameter.

* Cables can be supplied in longer length.

CA4	Satin Chrome	001
CA4/PC	Polished Chrome	
CA4/BR	Polished Brass	

INSULATED CABLE WITH CEILING TO FLOOR FIXINGS Supplied with 4M (13' 1-1/2") Long Cable

- With clear PVC sleeving. Includes Spring Tensioner, top and bottom fixings.
- Cut out sleeving to accommodate fitting.

Length: 4m (13' 1-1/2"), Top Fixing: 16mm (5/8") Diameter, Bottom Fixing: 15mm (19/32") Diameter.

* Cables can be supplied in longer length.

CA4S	Satin Chrome	002
CA4S/PC	Polished Chrome	
CA4S/BR	Polished Brass	



QUICK FIT CABLE Supplied with 4M (13' 1-1/2") Long Cable


- Design to be used with channel top and bottom.
- Includes 4m (13' 1-1/2") of cable, Two Quick Fit Toggles & Spring Tensioner.

Length: 4m (13' 1-1/2"), Top Fixing: 16mm (5/8") Diameter, Bottom Fixing: 16mm (5/8") Diameter.



* Cables can be supplied in longer length.

* Not to be used with lighting. See page 14 for channels.

CQQ	Satin Chrome	003
CQQ/PC	Polished Chrome	
CQQ/BR	Polished Brass	



QUICK FIT TOGGLE - Brass toggle that screws into the top end of a cable or wall fitting. Unit fits directly into almost any make of channel.

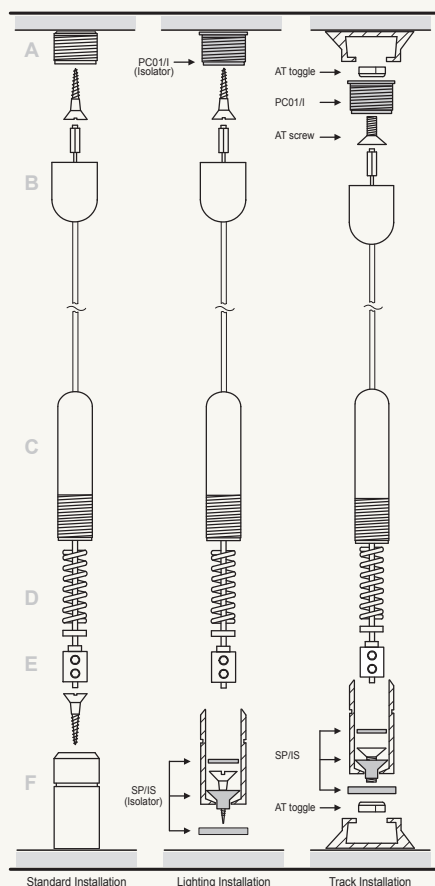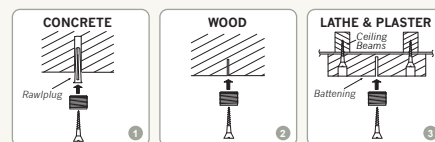

CABLE WITH TOP FIXING Supplied with 2M (6' 6-3/4") Long Cable

- Ideal for supporting signs & graphic panels.

Length: 2m (6' 6-3/4"), Top/Ceiling Fixing 16mm (5/8") Diameter.

* Cables can be supplied in longer length.

C2	Satin Chrome	004
C2/PC	Polished Chrome	
C2/BR	Polished Brass	




CABLE WITH TOP FIXING & PANEL CLAMP Supplied with 2M (6' 6-3/4") Long Cable

- Ideal for supporting signs & graphic panels from above.
- Support to take up to 7mm (1/4") thick panels.

Length: 2m (6' 6-3/4"), Top/Ceiling Fixing 16mm (5/8") Diameter, Panel Support 23mm (29/32") Length.

* Cables can be supplied in longer length.

C2-CG05	Satin Chrome	005
C2-CG05/PC	Polished Chrome	
C2-CG05/BR	Polished Brass	



INSTALLATION TIPS Cable Top Fixing



- It is essential to check that the ceiling fixings are strong enough to take the weight of the items being displayed, whilst allowing for the tension in the cables. No responsibility will be taken for incorrect fixing. This responsibility rests with the installer.
- Cables are not supplied with fixing screws. (Req. number 10 screw, bolt or toggle bolt)

Cable Display Systems

1.5mm Cables & Fixings



- The minimalist approach allows your products to take the floor, the ceiling, the wall, the window...

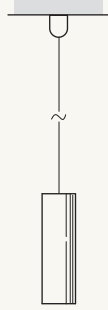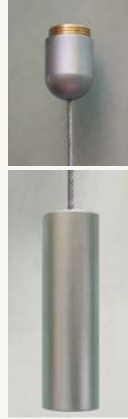

CABLE WITH TOP FIXING & WEIGHT Supplied with 4M (13' 1-1/2") Long Cable

- Ideal for supporting light graphic panels and banner presentations.

Length: 4m (13' 1-1/2"), Top Fixing: 16mm (5/8") Diameter, Weight: 4" Long, 32mm (1-1/8") Diameter, 1.25 lbs.

* Cables can be supplied in longer length.

CCT	Satin Chrome	006
N/A	Polished Chrome	
N/A	Polished Brass	




CABLE WITH ADJUSTABLE ANGLE TOP FIXING & WEIGHT Supplied with 4M (13' 1-1/2") Long Cable

- Ideal for supporting light graphic panels and banner presentations.

Length: 4m (13' 1-1/2"), Top Fixing: 16mm (5/8") Diameter, Weight: 4" Long, 32mm (1-1/8") Diameter, 1.25 lbs.

* Cables can be supplied in longer length.

CAT	Satin Chrome	007
N/A	Polished Chrome	
N/A	Polished Brass	




CABLE WITH WALL TO WALL FIXINGS Supplied with 3M (9' 10") Long Cable

- Use for suspending poster graphics, signage, etc.
- Includes cable, fixings, spring tensioner, and fixing plates.

Length: 3m (9' 10"), Cable Fixing Projects 40mm (1-37/64") from wall, Fixing Plates: 38mm (1-1/2") Diameter.

* Cables can be supplied in longer length.

CWW	Satin Chrome	008
CWW/PC	Polished Chrome	
CWW/BR	Polished Brass	



CABLE WITH WALL TO FLOOR FIXINGS Supplied with 3M (9' 10") Long Cable

- Use for suspending poster graphics, signage, etc.
- Includes cable, fixings, spring tensioner, and fixing plates.

Length: 3m (9' 10"), Cable Fixing Projects 40mm (1-37/64") from wall, Floor Fixing 15mm (19/32") Diameter.


* Cables can be supplied in longer length.

CWF	Satin Chrome	009
CWF/PC	Polished Chrome	
CWF/BR	Polished Brass	



Simple, streamlined and unobtrusive, the cables are almost invisible to the eye, the combinations are endless... enabling you to make a strong design statement...

HARDWARE OPTIONS Cable Fixings

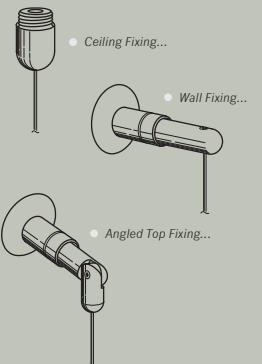

PRODUCT INFO:

For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.

Cable Display Systems

1.5mm Cables & Fixings

CABLE WITH CEILING TO WALL FIXINGS


Supplied with 3M (9' 10") Long Cable

- Use for suspending poster graphics, signage, etc.
- Includes cable, fixings, spring tensioner, and fixing plates.

Length: 3m (9' 10"), Top Fixing: 15mm (5/8") Diameter, Cable Fixing Projects 40mm (1.37/64") from wall.

* Cables can be supplied in longer length.

CCW	Satin Chrome	010
CCW/PC	Polished Chrome	
CCW/BR	Polished Brass	



CABLE WITH ADJUSTABLE ANGLE TOP & BOTTOM FIXINGS


Supplied with 4M (13' 1-1/2") Long Cable

- Use for suspending shelving, graphic panels, banner presentations, signage, etc.

Length: 4m (13' 1-1/2"), Top and Bottom Fixing: 38mm (1-1/2") Diameter.

* Cables can be supplied in longer length.

CAA	Satin Chrome	011
CAA/PC	Polished Chrome	
CAA/BR	Polished Brass	



CABLE WITH ADJUSTABLE ANGLE TOP & STANDARD FLOOR FIXING


Supplied with 4M (13' 1-1/2") Long Cable

- Use for suspending shelving, graphic panels, banner presentations, signage, etc.

Length: 4m (13' 1-1/2"), Top and Bottom Fixing: 38mm (1-1/2") Diameter, Floor Fixing: 15mm (19/32") Diameter.

* Cables can be supplied in longer length.

CAF	Satin Chrome	012
CAF/PC	Polished Chrome	
CAF/BR	Polished Brass	



TWIN CABLE WITH SINGLE TOP/CEILING FIXING


Supplied with 4M (13' 1-1/2") Long Cable

- Single ceiling fixing for two 4m (13' 1-1/2") cables fixed to the floor, standard cable centers 300mm (11-7/8").
- Tensioner fitted on bottom.

Size: Top Fixing: 18mm (45/64") Diameter, Floor Fixings: 15mm (19/32") Diameter.

* Cables can be supplied in longer length.

C2A4F	Satin Chrome	013
C2A4F/PC	Polished Chrome	
C2A4F/BR	Polished Brass	



CAVENDISH HOUSE

4 ELIT INTERNATIONAL

3 ELIT INTERNATIONAL
Administration and Accounts



2 SEARCH CONSULTANT
INTERNATIONAL LTD

1 ELIT INTERNATIONAL
Sales and Production

INSTALLATION TIPS

Adjustable Angle Fixing

- Use angled top/bottom supports for mounting the cable system onto any horizontal, vertical or angled surface...

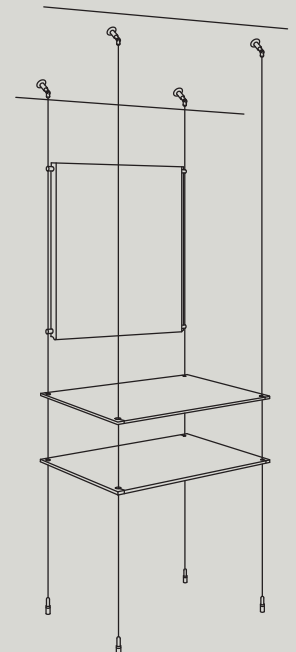

HARDWARE OPTIONS:


For a custom cable length contact our sales department. Fabrication lead-time may vary... 2-4 weeks

FINISH OPTIONS:

Standard finishes: Satin Chrome, Polished Chrome, Brass. Special finishes available on request.

Cable Display Systems

1.5mm Cables & Fixings

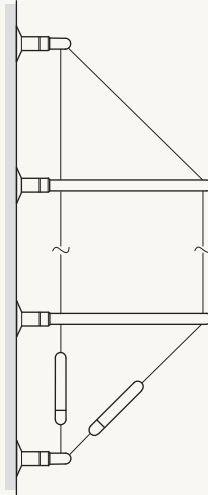

WALL TO WALL FITTINGS WITH TWO 3M (9' 10") CABLES 150mm (5-7/8") Cable Centers

- Creates a stylish support for shelving and graphics.

Size: Wall Brackets: 38mm (1-1/2") Diameter Top and Bottom, 40mm (1-3/7/64") from wall to back cable.
* Cables can be supplied in longer length.


C2WW-15	Satin Chrome	014
C2WW-15/PC	Polished Chrome	
C2WW-15/BR	Polished Brass	

WALL TO WALL FITTINGS WITH TWO 3M (9' 10") CABLES 300mm (11-7/8") Cable Centers

- Creates a stylish support for shelving and graphics.

Size: Wall Brackets: 38mm (1-1/2") Diameter Top and Bottom, 40mm (1-3/7/64") from wall to back cable.
* Cables can be supplied in longer length.

C2WW-30	Satin Chrome	015
C2WW-30/PC	Polished Chrome	
C2WW-30/BR	Polished Brass	

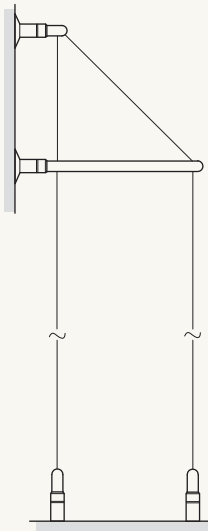

WALL TO FLOOR FITTINGS WITH TWO 3M (9' 10") CABLES 150mm (5-7/8") Cable Centers

- Creates a stylish support for shelving and graphics.

Size: Top Wall Bracket: 38mm (1-1/2") Diameter, 40mm (1-3/7/64") from wall to back cable, Floor Fixing: 15mm (19/32") Diameter.
* Cables can be supplied in longer length.


C2WF-15	Satin Chrome	016
C2WF-15/PC	Polished Chrome	
C2WF-15/BR	Polished Brass	

WALL TO WALL FITTINGS WITH TWO 3M (9' 10") CABLES 300mm (11-7/8") Cable Centers

- Creates a stylish support for shelving and graphics.

Size: Top Wall Bracket: 38mm (1-1/2") Diameter, 40mm (1-3/7/64") from wall to back cable, Floor Fixing: 15mm (19/32") Diameter.
* Cables can be supplied in longer length.

C2WF-30	Satin Chrome	017
C2WF-30/PC	Polished Chrome	
C2WF-30/BR	Polished Brass	

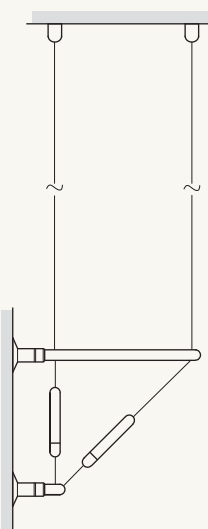

CEILING TO WALL FITTINGS WITH TWO 3M (9' 10") CABLES 150mm (5-7/8") Cable Centers

- Creates a stylish support for shelving and graphics.

Size: Ceiling Fixing: 16mm (5/8") Diameter, Wall Bracket: 38mm (1-1/2") Diameter, 40mm (1-3/7/64") from wall to back cable.
* Cables can be supplied in longer length.


C2CW-15	Satin Chrome	018
C2CW-15/PC	Polished Chrome	
C2CW-15/BR	Polished Brass	

CEILING TO WALL FITTINGS WITH TWO 3M (9' 10") CABLES 300mm (11-7/8") Cable Centers

- Creates a stylish support for shelving and graphics.

Size: Ceiling Fixing: 16mm (5/8") Diameter, Wall Bracket: 38mm (1-1/2") Diameter, 40mm (1-3/7/64") from wall to back cable.
* Cables can be supplied in longer length.

C2CW-30	Satin Chrome	019
C2CW-30/PC	Polished Chrome	
C2CW-30/BR	Polished Brass	

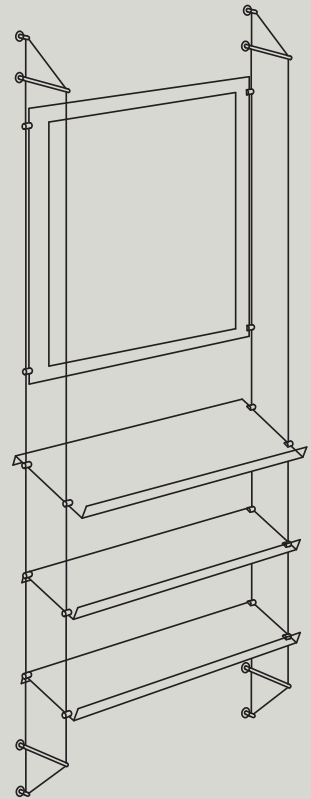

DESIGN TIPS

- Create the most stylish and practical product display. Use the glass shelves for best product visibility, increase your merchandising area, while enhancing the appeal of the product displayed.



■ ORDERING TIP:

For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

■ ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.

Cable Display Systems


Panel Supports for 1.5mm Cables

VERTICAL SUPPORT - SINGLE

• For panels up to 4mm (1/8") thick

Size: 15mm (19/32") Length, 10mm (25/64") Diameter.

CG03	Satin Chrome	020
CG03/PC	Polished Chrome	
CG03/BR	Polished Brass	




VERTICAL SUPPORT - DOUBLE

• For panels up to 4mm (1/8") thick

Size: 22mm (55/64") Length, 10mm (25/64") Diameter.

CG04	Satin Chrome	021
CG04/PC	Polished Chrome	
CG04/BR	Polished Brass	




VERTICAL SUPPORT - SINGLE

• For panels up to 7mm (1/4") thick

Size: 20mm (25/32") Length, 16mm (5/8") Diameter.

CG01	Satin Chrome	022
CG01/PC	Polished Chrome	
CG01/BR	Polished Brass	




VERTICAL SUPPORT - DOUBLE

• For panels up to 7mm (1/4") thick

Size: 32mm (1-17/64") Length, 16mm (5/8") Diameter.

CG02	Satin Chrome	023
CG02/PC	Polished Chrome	
CG02/BR	Polished Brass	



VERTICAL SUPPORT - SINGLE

• For panels up to 12.7mm (1/2") thick

Size: 20mm (25/32") Length, 20.5mm (13/16") Diameter.

CG14	Satin Chrome	024
CG14/PC	Polished Chrome	
CG14/BR	Polished Brass	




VERTICAL SUPPORT - SINGLE

• For panels up to 12mm (15/64") thick with insert for holes.

Size: 31mm (1-7/32") Length, 21mm (53/64") Diameter, 8.5mm (11/32") Dia. hole required, 15mm (19/32") from edge of panel.

CG08	Satin Chrome	025
CG08/PC	Polished Chrome	
CG08/BR	Polished Brass	




MULTI-POSITION SUPPORT - SINGLE

• For panels up to 7mm (1/4") thick.

• Adjustable to any angle. Can be locked into position.

Size: 27mm (1-1/16") Length, 16mm (5/8") Diameter.


CG11	Satin Chrome	026
CG11/PC	Polished Chrome	
CG11/BR	Polished Brass	



- The cable/rod systems can be completely customized to coordinate with any design scheme. It works in harmony with any traditional or modern concept and leaves the rest to your imagination...

DESIGN TIPS

- Using single and double clamp supports for graphic panels and acrylic poster holders will increase your display flexibility...

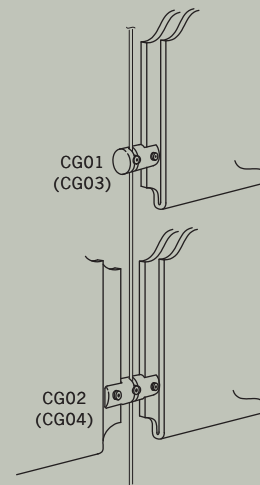

- Use single & double multi-position clamp supports to mount sloping shelves, angled graphic panels and signage...



HARDWARE OPTIONS:



CG08 supports two 6mm (15/64") thick glass panels with poster in between. Held on to the cable with two set screws.

FINISH OPTIONS:

Standard finishes: Satin Chrome, Polished Chrome, Brass. Special finishes available on request.

Cable Display Systems

Panel Supports for 1.5mm Cables

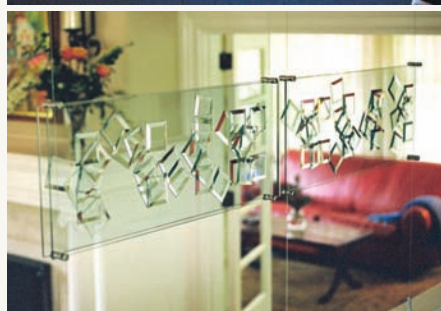


MULTI-POSITION SUPPORT - DOUBLE

- For panels up to 7mm (1/4") thick.
- Adjustable to any angle. Can be locked into position.

Size: 46mm (1-13/16") Length, 16mm (5/8") Diameter.

CG21	Satin Chrome	027
CG21/PC	Polished Chrome	
CG21/BR	Polished Brass	




MULTI-POSITION SUPPORT - SINGLE

- For panels up to 10mm (3/8") thick.
- Adjustable to any angle. Can be locked into position.

Size: 27mm (1-1/16") Length, 18mm (45/64") Diameter.

CG13	Satin Chrome	028
CG13/PC	Polished Chrome	
CG13/BR	Polished Brass	




MULTI-POSITION SUPPORT - DOUBLE

- For panels up to 10mm (3/8") thick.
- Adjustable to any angle. Can be locked into position.

Size: 46mm (1-13/16") Length, 18mm (45/64") Diameter.

CG23	Satin Chrome	029
CG23/PC	Polished Chrome	
CG23/BR	Polished Brass	




TOP/BOTTOM SUPPORT

- For panels up to 7mm (1/4") thick.
- For panels wider than the distance between cables.

Size: 22mm (55/64") Length, 16mm (5/8") Diameter.

CG09	Satin Chrome	030
CG09/PC	Polished Chrome	
CG09/BR	Polished Brass	




TOP/BOTTOM MULTI POSITION SUPPORT - SINGLE

- For panels up to 7mm (1/4") thick.
- For panels wider than the distance between cables.

Size: 30mm (1-3/16") Length, 16mm (5/8") Diameter.

CG12	Satin Chrome	031
CG12/PC	Polished Chrome	
CG12/BR	Polished Brass	




TOP/BOTTOM MULTI POSITION SUPPORT - DOUBLE

- For panels up to 7mm (1/4") thick.
- For panels wider than the distance between cables.

Size: 46mm (1-13/16") Length, 16mm (5/8") Diameter.

CG22	Satin Chrome	032
CG22/PC	Polished Chrome	
CG22/BR	Polished Brass	



SUPPORT FOR PANELS WITH HOLES - SINGLE


- To hold standard panels 7mm (1/4") thick.
- Hole size 6mm (15/64") Dia.
- Supports panels up to 20mm (3/4") thick are also available.

Size: 23.5mm (59/64") Length, 16mm (5/8") Diameter.

CS13	Satin Chrome	033
CS13/PC	Polished Chrome	
CS13/BR	Polished Brass	



- Use CG09 top/bottom support to suspend panels wider than distance between cables...

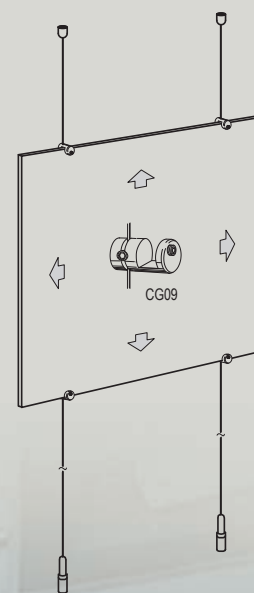

■ ORDERING TIP:

CS13 & CS23 - For extra thick panels up to 20mm (3/4"), specify size required. For example: CS13/S/xx

■ ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.

Cable Display Systems


Panel & Frame Supports for 1.5mm Cables

SUPPORT FOR PANELS WITH HOLES - DOUBLE

- To hold standard panels 7mm (1/4") thick.
- Hole size 6mm (15/64") Dia.
- Supports panels up to 20mm (3/4") thick are also available.

Size: 38.5mm (1-33/64") Length, 16mm (5/8") Diameter.

CS23	Satin Chrome	034
CS23/PC	Polished Chrome	
CS23/BR	Polished Brass	




PICTURE HOOK - SINGLE

- For mounting framed artwork

Size: 30mm (1-3/16") Height, 15mm (19/32") Depth, 16mm (5/8") Diameter.

CS12	Satin Chrome	035
N/A	Polished Chrome	
N/A	Polished Brass	



PICTURE HOOK - DOUBLE

- For mounting framed artwork

Size: 30mm (1-3/16") Height, 22mm (55/64") Depth, 16mm (5/8") Diameter.

CS22	Satin Chrome	036
N/A	Polished Chrome	
N/A	Polished Brass	



SUPPORT FOR SCREW FIX PANEL - SINGLE

- For any item fitted with boss ref. P02 (see below) or banner/hanging rail.

Size: 14mm (35/64") Length, 12mm (15/32") Internal Diameter, 6mm (15/64") Internal Depth, 16mm (5/8") Diameter.

CS03	Satin Chrome	037
CS03/PC	Polished Chrome	
CS03/BR	Polished Brass	



SUPPORT FOR SCREW FIX PANEL - DOUBLE

- For any item fitted with boss ref. P02 (see below) or banner/hanging rail.

Size: 20mm (25/32") Length, 12mm (15/32") Internal Diameter, 6mm (15/64") Internal Depth, 16mm (5/8") Diameter.

CS04	Satin Chrome	038
CS04/PC	Polished Chrome	
CS04/BR	Polished Brass	



BOSS FOR USE WITH SUPPORTS

- Ref. CS03 or CS04. Use with up to no. 10 countersunk wood screw or bolt.

Size: 12mm (15/32") Diameter, 6mm (15/64") Depth.

P02	Nickel	039




HOOK - SINGLE



- For panels up to 3mm (1/8") thick with holes.

Size: 16mm (5/8") Length, 16mm (5/8") Diameter.

CH01	Satin Chrome	040
CH01/PC	Polished Chrome	
CH01/BR	Polished Brass	




HARDWARE OPTIONS

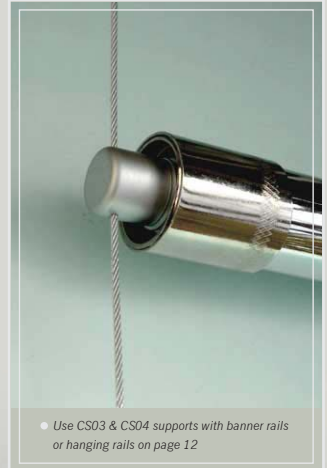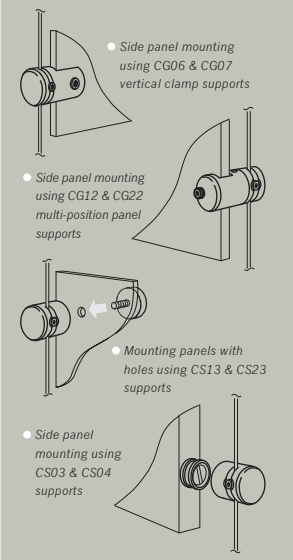

Cable Display Systems


Shelf Supports for 1.5mm Cables



HOOK - DOUBLE

- For panels up to 3mm (1/8") thick.
- Size: 24mm (15/16") Length, 16mm (5/8") Diameter.

CH02	Satin Chrome	041
CH02/PC	Polished Chrome	
CH02/BR	Polished Brass	




SUPPORT FOR SHELVES WITH HOLES

- Locates under shelf.
- Shelf is drilled and slotted.
- Inconspicuous.

Size: 8mm (5/16") Depth, 16mm (5/8") Diameter.

CS01	Satin Chrome	042
CS01/PC	Polished Chrome	
CS01/BR	Polished Brass	




SUPPORT FOR WOODEN OR GLASS SHELVES - SINGLE

- Adjustable to any angle of slope.
- Can be locked into position.
- For glass shelves add ref. P08.

Size: 36mm (1-27/64") Length, 16mm (5/8") Diameter.

CS11	Satin Chrome	043
CS11/PC	Polished Chrome	
CS11/BR	Polished Brass	



SUPPORT FOR WOODEN OR GLASS SHELVES - DOUBLE

- Adjustable to any angle of slope.
- Can be locked into position.
- For glass shelves add ref. P08.

Size: 64mm (2-33/64") Length, 16mm (5/8") Diameter.


CS21	Satin Chrome	044
CS21/PC	Polished Chrome	
CS21/BR	Polished Brass	



SCREW TO RETAIN GLASS SHELVES

- Supported on CS11 or CS21 to hold 6mm (15/64") thick as standard.
- Flush Finish. Plastic insert to protect glass
- Size: 16mm Dia., 6mm Dia. Hole, 12mm from the edge of the glass.

P08	Satin Chrome	045
P08/PC	Polished Chrome	
P08/BR	Polished Brass	



CLAMP SUPPORT FOR GLASS SHELVES - SINGLE

- For Glass or Acrylic Shelves - up to 7mm (1/4") thick.
- Holes not required.

Size: 20mm (25/32") Length, 16mm (5/8") Diameter.

CG06	Satin Chrome	046
CG06/PC	Polished Chrome	
CG06/BR	Polished Brass	



CLAMP SUPPORT FOR GLASS SHELVES - DOUBLE

- For Glass or Acrylic Shelves - up to 7mm (1/4") thick.
- Holes not required.

Size: 32mm (1-17/64") Length, 16mm (5/8") Diameter.

CG07	Satin Chrome	047
CG07/PC	Polished Chrome	
CG07/BR	Polished Brass	




- All clamp support fittings are supplied with special nylon tipped set screws that ensure an excellent grip.

HARDWARE OPTIONS

- Support CS01 locates under shelf and requires shelf to be drilled or slotted.



- Support CG06 can be attached to the front or side edge of the glass shelf...



- Glass shelf mounting using CS11 & P08 supports

HARDWARE OPTIONS:

P08 - Flush finish. Plastic insert to protect glass. Hole 6mm (15/64") Dia., 6mm (15/64") thick glass, 12mm (15/32") from the edge of glass.

ORDERING TIP:

For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

Cable Display Systems


Shelf & Rod Supports for 1.5mm Cables

CLAMP SUPPORT FOR GLASS SHELVES - SINGLE

- For Glass or Acrylic Shelves - up to 12.7mm (1/2") thick.
- Holes not required.

Size: 20mm (25/32") Length, 20.5mm (13/16") Diameter.

CG15	Satin Chrome	048
CG15/PC	Polished Chrome	
CG15/BR	Polished Brass	




MULTI-POSITION SHELF SUPPORT - SINGLE

- For shelves up to 7mm (1/4") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 27mm (1-1/16") Length, 16mm (5/8") Diameter.

CG11	Satin Chrome	049
CG11/PC	Polished Chrome	
CG11/BR	Polished Brass	




MULTI-POSITION SHELF SUPPORT - DOUBLE

- For shelves up to 7mm (1/4") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 46mm (1-13/16") Length, 16mm (5/8") Diameter.

CG21	Satin Chrome	050
CG21/PC	Polished Chrome	
CG21/BR	Polished Brass	




MULTI-POSITION SHELF SUPPORT - SINGLE

- For shelves up to 10mm (3/8") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 27mm (1-1/16") Length, 18mm (45/64") Diameter.

CG13	Satin Chrome	051
CG13/PC	Polished Chrome	
CG13/BR	Polished Brass	




MULTI-POSITION SHELF SUPPORT - DOUBLE

- For shelves up to 10mm (3/8") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 46mm (1-13/16") Length, 18mm (45/64") Diameter.

CG23	Satin Chrome	052
CG23/PC	Polished Chrome	
CG23/BR	Polished Brass	



SUPPORT FOR ROD - SINGLE

- For 6mm (15/64") Dia. Rod
- Rods will hold acrylic pockets, leaflet dispensers, banners & graphics.

Size: 14mm (35/64") Length, 16mm (5/8") Diameter.

CS05	Satin Chrome	053
CS05/PC	Polished Chrome	
CS05/BR	Polished Brass	



SUPPORT FOR ROD - DOUBLE

- For 6mm (15/64") Dia. Rod
- Rods will hold acrylic pockets, leaflet dispensers, banners & graphics.

Size: 20mm (25/32") Length, 16mm (5/8") Diameter.


CS06	Satin Chrome	054
CS06/PC	Polished Chrome	
CS06/BR	Polished Brass	



DESIGN TIPS


Mix & Match

- add signs & graphic panels
- low voltage lighting
- glass shelving
- acrylic pockets...




HARDWARE OPTIONS


- Clamp supports for glass shelves... back and front attachment



- Clamp supports for glass shelves... side attachment



- Multi-position clamp supports... use for sloping shelves suspension



ORDERING TIP:


The following details must be provided when ordering: product name, item number, and item finish code.

FINISH OPTIONS:



Standard finishes: Satin Chrome, Polished Chrome, Brass. Special finishes available on request.

Cable Display Systems

Sundry Fittings/Rod & Rail Supports for 1.5mm Cables

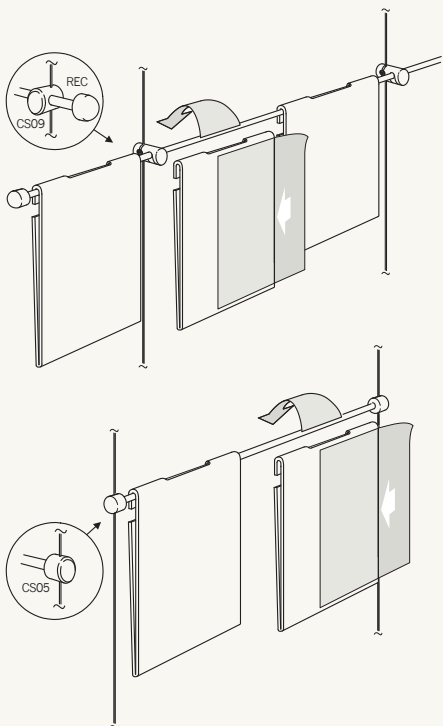

- *Hook-on Displays are an alternative to traditional slat-wall system, just hook on acrylic pockets or other accessories. The system allows you to create stylish interior displays for all types of information. Its an easy to use system which allows you to change the information fast.*

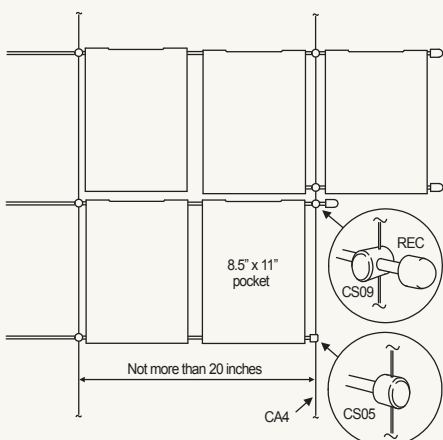


SUPPORT FOR ROD - MULTI-POSITION

- For 6mm (15/64") Dia. Rod.
- Adjustable to any angle.
- Can be locked into position.

Size: 28mm (1-7/64") Length, 16mm (5/8") Diameter.

CS07	Satin Chrome	055
CS07/PC	Polished Chrome	
CS07/BR	Polished Brass	




SUPPORT FOR ROD - FIXED POSITION

- For 6mm (15/64") Dia. Rod
- Rods will hold acrylic pockets, leaflet dispensers, banners & graphics.

Size: 17mm (43/64") Length, 16mm (5/8") Diameter.

CS09	Satin Chrome	056
CS09/PC	Polished Chrome	
CS09/BR	Polished Brass	



DECORATIVE END CUP FOR ROD

- For 6mm (15/64") Dia. Rod

Size: 16mm (5/8") Length, 12mm (15/20") Diameter.

REC	Satin Chrome	057
REC/PC	Polished Chrome	
REC/BR	Polished Brass	



SUPPORT FOR SCREW FIX PANEL - SINGLE

- For any item fitted with boss ref. P02 (see below) or banner/hanging rail.

Size: 14mm (35/64") Length, 12mm (15/32") Internal Diameter, 6mm (15/64") Internal Depth, 16mm (5/8") Diameter.

CS03	Satin Chrome	058
CS03/PC	Polished Chrome	
CS03/BR	Polished Brass	




SUPPORT FOR SCREW FIX PANEL - DOUBLE

- For any item fitted with boss ref. P02 (see below) or banner/hanging rail.

Size: 20mm (25/32") Length, 12mm (15/32") Internal Diameter, 6mm (15/64") Internal Depth, 16mm (5/8") Diameter.

CS04	Satin Chrome	059
CS04/PC	Polished Chrome	
CS04/BR	Polished Brass	




BOSS FOR USE WITH SUPPORTS

- Ref. CS03 or CS04. Use with up to no. 10 countersunk wood screw or bolt.

Size: 12mm (15/32") Diameter, 6mm (15/64") Depth.

P02	Nickel	060
------------	---------------	-----





HANGING / BANNER RAIL

- Heavy Duty - Ideal for garments and banners.
- Polished chrome rails, supplied with supports to fit directly onto cables, no additional fittings required.


Size: 25mm (1") & 19mm (3/4") Dia., 3 & 4 Feet Length

HR25C-3/PC	1" Dia., 3' Long	061
HR25C-4/PC	1" Dia., 4' Long	
BR19C-3/PC	3/4" Dia., 3' Long	
BR19C-4/PC	3/4" Dia., 4' Long	

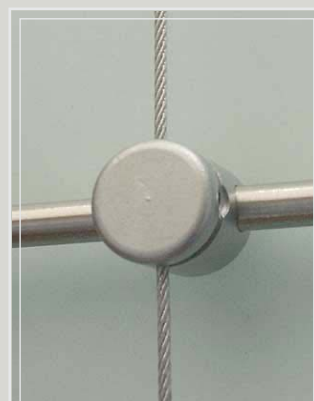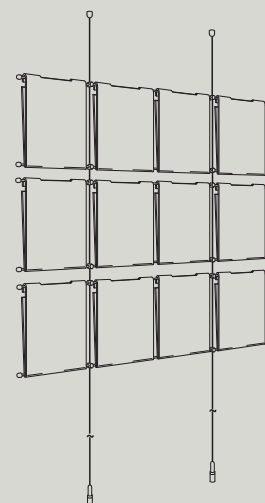

HARDWARE OPTIONS

- Use CS05 & CS09 supports with horizontal rods to create hook-on suspended displays.
- Ideal for displaying information in windows or interiors.
- Great for realty estate offices.
- Pockets are available in various sizes.

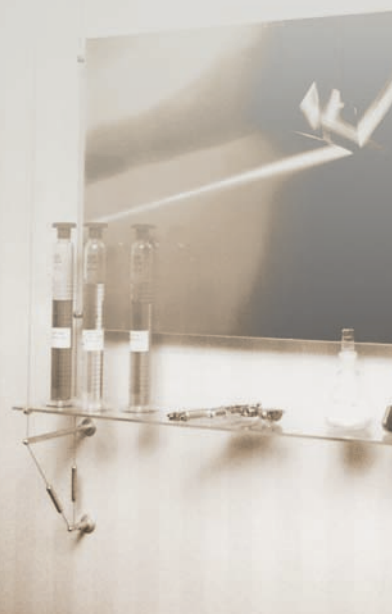

■ ORDERING TIP:

For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

Cable Display Systems

Installation Accessories for 1.5mm & 3.0mm Cables


POWER CONNECTOR

- Allows electrical power to be connected to the cable.
- Excellent connection.

Size: 12mm (15/32") Diameter, 12mm (15/23") Length.

CS08	Satin Chrome	062
CS08-3	Satin Chrome	

* Use CS08-3 power connector with 3mm (1/8") Dia. Cable or Rod System.



TOP ISOLATOR

- Black nylon for cables.

Size: 16mm (5/8") Diameter.

PC01/I	Black	063



BOTTOM ISOLATOR

- 3 sections in white nylon.

SP/IS	White	064



QUICK FIT TOGGLE

- Brass toggle that screws into the top end of a cable or wall fitting.
- Unit fits directly into almost any make of channel.
- Invisible when used

PC01-Q	Brass	065

* Not to be used with lighting.



TOGGLE

- For fixing cables to channels. Can be used with all top and bottom fittings.
- Allen key provided.

AT	Silver	066
AT/S	Silver	
AT/L	Silver	

* For fixing cable/rod fittings to channel order AT

* For fixing MSB brackets to channel order AT/S

* Long version AT/L for use with isolators.



DECORATIVE SUPPORT PLATE

- Add to any of the cable / rod systems fittings.

Size: 38mm (1-1/2") Diameter.

P01	Satin Chrome	067
P01/PC	Polished Chrome	
P01/BR	Polished Brass	



SINGLE WALL BRACKET


- Available in 3 sizes. All units can be fitted to the wall using up to no. 10 screws. Supplied with nut and bolt to connect cable to bracket.

MSB-25: 30mm (1-3/16") Height, 35mm (1-3/8") Depth, Cable Fixing: 25mm (63/64") from wall.

MSB: 60mm (2-23/64") Height, 60mm (2-23/64") Depth, Cable Fixing: 50mm (1-31/32") from wall.


MSB-100: 110mm (4-21/64") Height, 110mm (4-21/64") Depth, Cable Fixing: 100mm (3-15/16") from wall.

MSB-25	Silver	068
MSB	Silver	
MSB-100	Silver	




INSTALLATION TIPS


Low Voltage Lighting



Drop Ceiling



Plaster Ceiling



Concrete Ceiling



- Quick Fit Toggle fits directly into almost any make of channel with 1/4" to 3/8" opening.



ORDERING TIP:

Toggle Fixing - Long version for use with isolators - order AT/L.

ORDERING TIP:


Order suitable toggle to connect the cable to the channel. Choose from PC01-Q Quick Toggle or AT Toggle Fixing.

Cable Display Systems

Installation Accessories for 1.5mm & 3.0mm Cables

Channel solves many installation challenges:

- Use channel when you wish to change the poster sizes and need different cable/rod centers.
- Use channel to create a feature area.
- Use channel to bring the display away from the wall or window.
- Use channel to bridge over a poor fixing area.
- Channel allows tremendous fixing flexibility. You can position cables anywhere along their length.



TRIANGULAR WALL BRACKET

- Supplied with 2 nuts and bolts to connect cables to brackets.
 - Supports 2 cables 300mm (11-7/8") apart.
 - Hi-tech appearance.
 - Can be used as a canopy of a sign support.
- Size: 350mm (1'1-25/32") Height, 350mm (1'1-25/32") Depth, Cable project from the wall 40mm (1-37/64") and 340mm (1'1-25/64").

MDB Silver

069



REBATE CHANNEL

- For ceiling or floor mounting. Cables or rods are fully moveable along the channel.
- For rebating into ceiling, floor, or shelves with a flush finish.

Size: 11.5mm (29/64") High; 19mm (7/8") Wide; 8.5mm (5/16") Channel Opening.

AC-10 Silver: 10 Feet

AC-8 Silver: 8 Feet

AC-4 Silver: 4 Feet

* AC-10 channel ships only in bulk via freight.

070



DOVETAIL CHANNEL


- For floor mounting. Cables or rods are fully moveable along the channel.
- Stylish appearance.

Size: 11.5mm (29/64") High; 28mm (1-7/64") Wide; 8.5mm (5/16") Channel Opening.

ACD-8 Silver: 8 Feet

ACD-4 Silver: 4 Feet

071



DOUBLE SIDED CHANNEL (*PH1005)

- For wall mounting with MSB wall brackets and toggles.

Size: 46mm (1-13/16") High, 19mm (7/8") Wide, 8.5mm (5/16") Channel Opening.

ACL-8 Silver: 8 Feet

ACL-4 Silver: 4 Feet

072

Miscellaneous / Cables & Set Screws



BARE CABLE

- Additional 1.5mm (1/16") and 3.0mm (1/8") diameter cables are available in two standard lengths.
- Supplied with copper couplings.

BC4 (BC4-3) 4m (13') Long

BC5 (BC5-3) 5m (16'-3") Long

* Cables can be supplied in longer length.

GRUB SCREWS FOR FITTINGS

- Spare grub screws for use with 1.5mm (1/16") and 3.0mm (1/8") diameter cable fittings.


P13G/S M3 x 3mm

P12 M3 x 6mm

P11 M5 x 6mm

P16 M4 x 6mm


P18 M4 x 4mm



NYLON TIPPED SCREWS

- Protects glass and acrylic from damage.

P10 M6 x 10mm

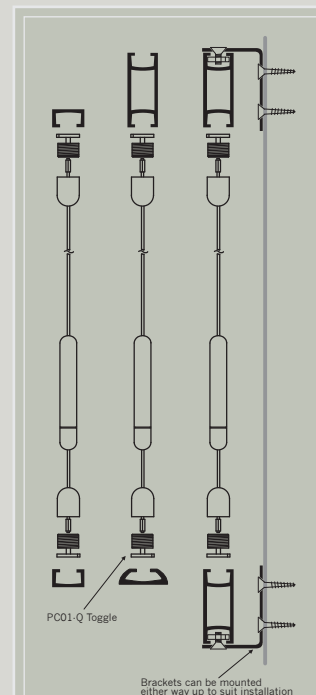

Brackets can be mounted either way up to suit installation

INSTALLATION TIPS

Channel Assembly

- Use rebate channel for ceiling or floor assembly.
- Use the dovetail (threshold) channel for floor assembly only.
- Use double sided channel for wall assembly or for ceiling assembly with heavier loads.

ORDERING TIP:

For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

Ordering, Payment & Return Policies

Ordering Policy

To start your order first, carefully review the product and service information on our web site, if you don't see exactly what you want, please contact us regarding availability, size, and quantity requirements for your project. Make sure you have decided on exactly what you need. Then, consult us on all your questions regarding our products, components and parts, because many of components can be easily confused. Contact us to receive a quote for your project. After placing an order, the customer receives via fax or e-mail a Customer Order Acknowledgment, which indicates in detail descriptions of items and pricing. Orders will not be processed without Nova Display, Inc. receiving a signed copy of said Customer Order Acknowledgment. Make sure to review and initial all areas. All changes to your orders of stock merchandise can be modified no later then 24 hours after receiving your order. We will call or fax you immediately should something change concerning your order.

Sample Policy

Nova Display, Inc. will provide samples for your testing and inspection. Most samples are supplied at 40% discounted cost (plus UPS Charges). If you need to order components for a prototype or fabrication of a prototype, please contact us for a quotation.

Payment Policy

All orders are shipped F.O.B Nova Display. We accept Visa, or Master Card, in addition to Money Orders, Cashier's Checks and Business/Personal Checks. For orders by phone, you may pre-pay your order via check or wire transfer. Orders prepaid with a check will be shipped within 24 hours of check clearance. New customers wishing to prepay an order totaling \$5,000 or more must allow 10 business days for their check to clear. This policy applies to personal, business, cashiers, and certified checks, as well as money orders.

Overseas customers may pay by Credit Card or Bank T/T at the time of shipment. We do not charge your credit card for any item until it is shipped, this doesn't apply to customized and non-standard items. All credit card orders are subject to credit verification and approval. For your protection, credit card orders shipped to an address other than your billing address may require additional verification.

Qualified businesses or organizations will be given Net 30 terms upon approved credit. In order to open an account, please provide a bank reference and three trade references. Customers with established credit are expected to pay NET within specific terms of their account, pre-established credit limits, and our standard Terms and Conditions, otherwise the line of credit will be discontinued.

All Custom Orders require a 50% Deposit before start of fabrication. Remainder due prior to shipping unless other terms have been determined by Nova Display, Inc. Credit Department.

All pricing and specifications are subject to change, without prior notice. Freight, handling and insurance will be added to your order. Please call for current pricing and availability. Send payments to: Nova Display, Inc., 1626 Piner Road, Santa Rosa, CA 94503

We also suggest you to use our automated ordering system when placing an order, or buying our products online. We accept electronic check payments via PayPal. It also allows you to make payments using VISA / Master Card / American Express. If you don't want to use our secure ordering system or are having problems using it call us toll free: 800-753-9688.

Quality Policy

All merchandise is produced to standard and commercial tolerances. Nova Display, Inc. warranties product to be free from defects in workmanship and material. When Nova Display has determined that a product is defective, it will be replaced. Nova Display liability is limited to the cost of the defective product. No other warranty is expressed or implied.

Shipping Policy

90% of orders on finished products are shipped out within 2-15 business days from our sales/distribution center. The custom made products or components which are not available in stock at the moment of ordering will be shipped in 2-8 weeks. Most orders are shipped via UPS or FedEx, unless otherwise specified. We offer express air and economical two day air service on most items in stock. For large orders, we'll ship freight collect by the most reliable and inexpensive carrier to your location.

Return Policy

Inspect all your shipment immediately upon arrival. If your order is not received in satisfactory condition, keep all packaging and notify us within (3) days of receipt. Stock merchandise in original, unopened packaging may be returned for refund within fifteen (15) days of receipt. Items must be in their original state (undamaged). Shipping and handling charges for returned items are non-refundable. All returns must be accompanied by the order statement. You may want to insure your return. We cannot be responsible for lost or misdirected returns. If you paid for your order by credit card, a credit will be issued and will appear on your billing statement. Returns must be insured for the invoiced value of the merchandise. Please note that custom merchandise is not returnable. A 15%-30% restocking fee will be charged on all returns. If you have any questions, ask your salesperson for details. Merchandise must be returned to: Nova Display, Inc., 1626 Piner Road., Santa Rosa, CA 95403-1908



*"All you need to create
high impact displays..."*

Lobbies

Receptions

Showrooms

Windows

Corridors

Exhibitions

Museums

Galleries

Offices

Retail Outlets

Banks

Point-of-Sale

Airports

Shopping Malls

Sport Arenas

Hotels

Universities

Colleges