



ONLINE CATALOG

6.0mm (1/4") Dia. Rod Display Systems

Features & Components



CONTACT INFORMATION

- To Order Products, Check Status of Your Order or Track Your Package... call toll free **800-753-9688**
- Send Your Inquires, Questions or Comments to **info@novadisplay.com**
(For assistance with general questions or actual display projects, please fax or e-mail us a short description and a graphical attachment. For best results, please send us a rough sketch or a project lay-out with dimensions and any special details. Using your drawing, we will generate a quote and specification sheet for the parts that lists the pricing, availability, delivery time, etc. You will receive a copy for review before ordering)
- For more information on our products and services, including pricing, technical information, and installation instructions visit our website at **www.novadisplay.com**
- You are also invited to visit our Online Store at **www.store.novadisplay.com**, where you will find various concept ideas and a comprehensive range of standard "Display Kits".

1626 Piner Road
Santa Rosa, CA 95403

1.800.753.9688 toll
1.800.753.0856 fax


1.707.535.0253 tel
1.707.535.0254 fax

www.novadisplay.com
www.store.novadisplay.com

info@novadisplay.com
sales@novadisplay.com

Rod Display Systems

6.0mm Rod System - Features & Benefits

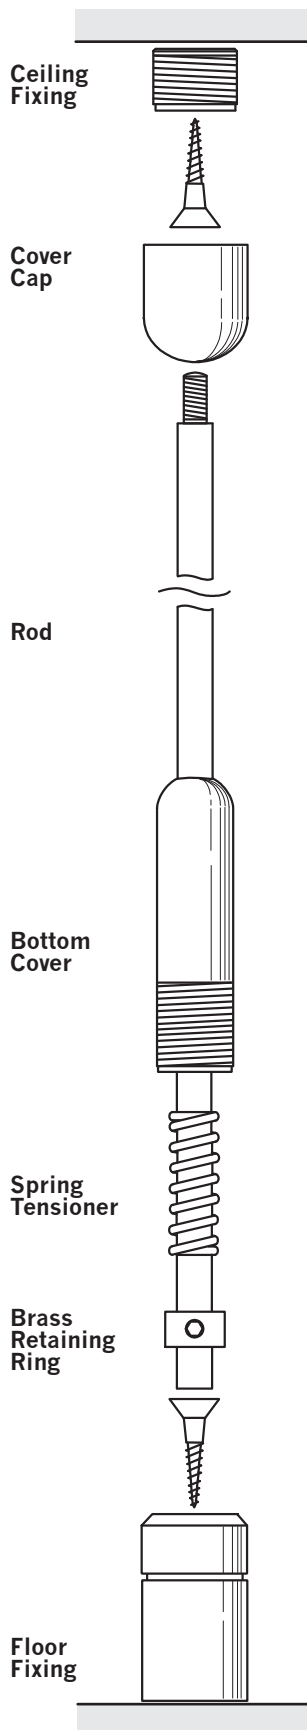


Top Fitting

- Top boss fixes to ceiling with a single screw (up to no.10) or toggle bolt ensuring a really secure fit.
- The top fixing covers up the boss.

Rod - 6.0mm

- Left handed M4 thread screws into top fixing.
- A male thread at one end and a female at the other, allow rods to be joined together to make any length.
- Once screwed together the rods appear continuous.

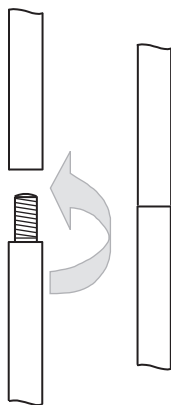

Standard Finishes for Rods

- Rods are made in stainless steel or brass and treated to create standard finishes:
- Stainless Steel
- Polished Chrome
- Polished Brass
- Black
- Special on request.


Bottom Fixing

- Perfect tension is maintained at all times by a spring tensioner.
- Rods are easily cut with a hacksaw to achieve the overall required length.
- The decorative line on bottom fitting indicates the cutting position.


Create a highly visual presentation using rods...

- **Extremely Strong**
Rods can support up to **200kg (441lbs)**. The rod system provides greater stability than cables, with dynamic, yet elegant appearance. The standard rod length is **1.5m (4' 11-1/16")**. Rods are available **0.5m (1' 7-11/16")** in length with one threaded end and one domed end. Non-threaded rod is available in **0.5m (1' 7-11/16")** and **1m (3' 3-1/32")** lengths.
Ideal for use with signage and horizontal presentations.
Use cut lengths of non-threaded rod as a tie-back to a wall to stabilize the rod.

- **Wall Fixing**
Fix rods directly back to the wall with **WM11** or **RS03**. Ideal for creating high impact graphics presentations.

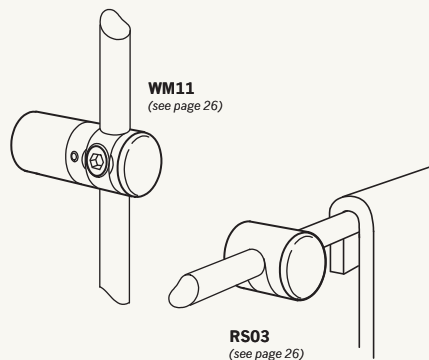

- **Customized Depth**
Fix rods back to the wall using **RP** - cut rod length and fix with **RS05** (page 30)

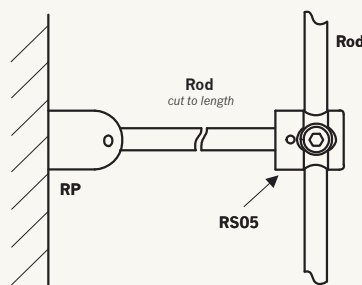


- *Designed and manufactured to the highest possible standards of quality.*
- *5 year guarantee on all metal components.*
- *Extensive range of components and accessories ensure complete design flexibility.*
- *Low voltage lighting can be fully integrated onto the 6mm rods.*




DESIGN TIPS

Customized Depth

- Fix rods back to the wall using **RP** connector - cut rod and fix with **RS05**

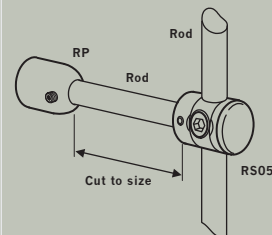

- For better stability fix cables back to the wall using **RP** and 6mm rods attached to cables using **CS05** support...

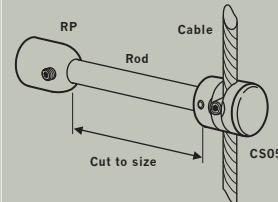

INSTALLATION TIPS

Rod Top Fixing

- It is essential to check that the ceiling fixings are strong enough to take the weight of the items being displayed. No responsibility will be taken for incorrect fixing. This responsibility rests with the installer.
- Rods are not supplied with fixing screws. (Req. number 10 screw, bolt or toggle bolt)

ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.

Rod Display Systems

6.0mm Rods & Fixings

THREADED ROD - BOTH ENDS 1.5M (4' 11-1/16") Rod, Left Hand Threaded

- A male thread at one end and a female at the other, allow rods to be joined together to make any length.
- Once screwed together the rods look like a continuous rod.

Size: 1.5m (4' 11-1/16") Length, 6mm (15/64") Diameter.

R1500	Stainless Steel	123
R1500/PC	Polished Chrome	
R1500/BR	Polished Brass	



THREADED ROD - ONE END ONLY 0.5M (1' 7-11/16") Rod, Left Hand Threaded

- A male thread at one end, domed at the other.

Size: 0.5m (1' 7-11/16") Length, 6mm (15/64") Diameter.

R500	Stainless Steel	124
R500/PC	Polished Chrome	
R500/BR	Polished Brass	



UNTHREADED ROD 1.0M (3' 3-3/8") Rod,

- Ideal for use with signage and horizontal presentations.
- Use cut lengths of non-threaded rod as a tie-back to a wall to stabilize the rod.

Size: 1.0m (3' 3-3/8") Length, 6mm (15/64") Diameter.

R1000P	Stainless Steel	125
R1000P/PC	Polished Chrome	
R1000P/BR	Polished Brass	



UNTHREADED ROD 0.5M (1' 7-11/16") Rod,

- Ideal for use with signage and horizontal presentations.
- Use cut lengths of non-threaded rod as a tie-back to a wall to stabilize the rod.

Size: 0.5m (1' 7-11/16") Length, 6mm (15/64") Diameter.

R500P	Stainless Steel	126
R500P/PC	Polished Chrome	
R500P/BR	Polished Brass	



TOP/BOTTOM FITTING FOR ROD

- The basic kit for fixing rods from ceiling to floor.
- Includes top fixing (screw fit) and bottom tensioner.

Size: Top & Bottom Fixing: 18mm (45/64") Diameter.

RAS	Satin Chrome	127
RAS/PC	Polished Chrome	
RAS/BR	Polished Brass	




ANGLED TOP FITTING WITH BOTTOM FLOOR SUPPORT

- Adjustable trough 180°, the top fitting can be fixed to a horizontal, vertical or sloping surface.
- Includes top fixing and bottom tensioner.

Size: Top Fixing: 15mm (19/32") Diameter, Bottom Fixing: 18mm (45/64") Diameter.

RAAS	Satin Chrome	128
RAAS/PC	Polished Chrome	
RAAS/BR	Polished Brass	




ROD CEILING SUPPORT - SCREW FIT

- Ideal for use with ceiling suspended signage and graphic presentations.

Size: 18mm (45/64") Diameter.

RS	Satin Chrome	129
RS/PC	Polished Chrome	
RS/BR	Polished Brass	

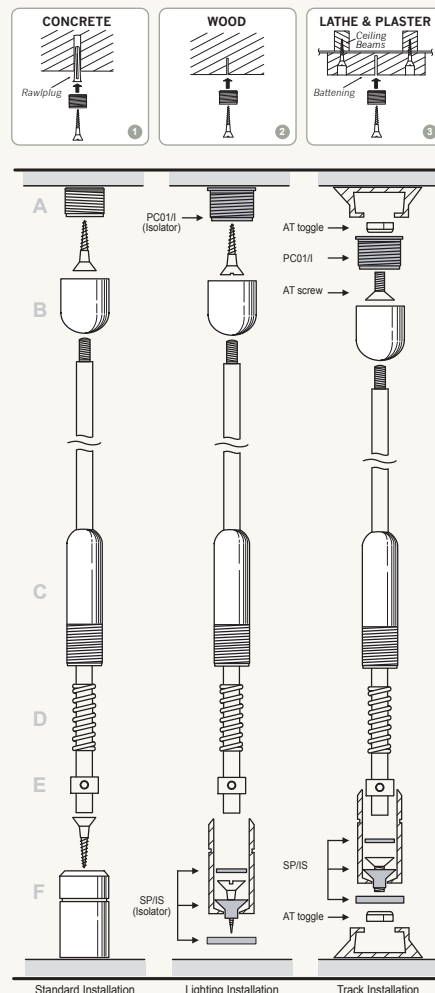

HARDWARE OPTIONS

- Use channel on page 33 for mounting rods to ceiling, floor or wall.
- Channel solves many installation challenges.
- Ensure complete freedom and flexibility in design... makes rods fully moveable.

INSTALLATION OPTIONS Rod Wall Mounting

- Screw fit support
- Push fit with grub screw support
- Multi-position rod wall support WM11 - Locks to any angle.

FINISH OPTIONS:

Standard finishes: Satin Chrome, Polished Chrome, Brass. Special finishes available on request.

Rod Display Systems

6.0mm Rods & Fixings




ROD SUPPORT - PUSH FIT

- Push fit with grub screw.
- Used for fixing rod to wall or base.

Size: 18mm (45/64") Diameter.

RP	Satin Chrome	130
RP/PC	Polished Chrome	
RP/BR	Polished Brass	




ANGLED TOP FITTING - SCREW FIT

- Adjustable trough 180°, the top fitting can be fixed to a horizontal, vertical or sloping surface.

Size: Top Fitting: 15mm (19/32") Diameter.

RSA	Satin Chrome	131
RSA/PC	Polished Chrome	
RSA/BR	Polished Brass	




ANGLED TOP FITTING - PUSH FIT

- Push fit with grub screw.
- Used for fixing rod to wall or base.

Size: Top Fitting: 15mm (19/32") Diameter.

RPA	Satin Chrome	132
RPA/PC	Polished Chrome	
RPA/BR	Polished Brass	




WALL FITTING FOR ROD

- Adjustable to any angle. Locks into position.
- Use for mounting horizontal or vertical rods to wall.
- Use up to no. 10 screw or toggle bolt to fix.

Size: 31mm (1-7/32") Length, 16mm (5/8") Diameter, Rod projects 15/16" from wall.

WM11	Satin Chrome	133
WM11/PC	Polished Chrome	
WM11/BR	Polished Brass	




SUPPORT FOR SCREW FIX PANEL - SINGLE

- For any item fitted with boss ref. P02 (see below) or banner/hanging rail.

Size: 18mm (45/64") Length, 12mm (15/32") Internal Diameter, 6mm (15/64") Internal Depth, 16mm (5/8") Diameter.

RS03	Satin Chrome	134
RS03/PC	Polished Chrome	
RS03/BR	Polished Brass	



SUPPORT FOR SCREW FIX PANEL - DOUBLE

- For any item fitted with boss ref. P02 (see below) or banner/hanging rail.

Size: 21mm (53/64") Length, 12mm (15/32") Internal Diameter, 6mm (15/64") Internal Depth, 16mm (5/8") Diameter.

RS04	Satin Chrome	135
RS04/PC	Polished Chrome	
RS04/BR	Polished Brass	



BOSS FOR USE WITH SUPPORTS

- Ref. RS03 or RS04. Use with up to no. 10 countersunk wood screw or bolt.

Size: 12mm (15/32") Diameter, 6mm (15/64") Depth.


P02	Nickel	136
-----	--------	-----



DESIGN TIPS

Hook-on Acrylic Pockets


- Fix rods directly back to the wall with WM11 support. Ideal for creating high impact graphics presentations.
- Hook-on acrylic pockets, leaflet dispensers, sloping shelves are used with wall-mounted horizontal rods. Ideal for displaying posters, literature, folded items, and other decorative items...

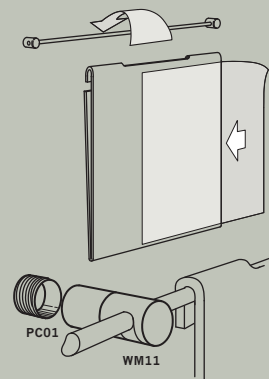

DESIGN TIPS

Hook-on Acrylic Shelving

- Fix rods directly back to the wall with RS03 & P02. Ideal for creating decorative or product display shelving.



ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.

HARDWARE OPTIONS:

Use P02 with any of supports RS03 or RS04. Fix it using up to no. 10 countersunk wood screw or bolt.

Rod Display Systems


Panel Supports for 6.0mm Rods

VERTICAL SUPPORT - SINGLE

- For panels up to 7mm (1/4") thick.

Size: 25mm (63/64") Length, 16mm (5/8") Diameter.

RG01	Satin Chrome	137
RG01/PC	Polished Chrome	
RG01/BR	Polished Brass	




VERTICAL SUPPORT - DOUBLE

- For panels up to 7mm (1/4") thick.

Size: 36mm (1-27/32") Length, 16mm (5/8") Diameter.

RG02	Satin Chrome	138
RG02/PC	Polished Chrome	
RG02/BR	Polished Brass	




VERTICAL SUPPORT - SINGLE Non-Removable

- For panels up to 7mm (1/4") thick.
- Supports signs from the side.

Size: 23mm (29/32") Length, 16mm (5/8") Diameter.

RGN01	Satin Chrome	139
RGN01/PC	Polished Chrome	
RGN01/BR	Polished Brass	




MULTI-POSITION PANEL SUPPORT - SINGLE

- For panels up to 7mm (1/4") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 30mm (1-3/16") Length, 16mm (5/8") Diameter.

RG11	Satin Chrome	140
RG11/PC	Polished Chrome	
RG11/BR	Polished Brass	




MULTI-POSITION PANEL SUPPORT - DOUBLE

- For panels up to 7mm (1/4") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 46mm (1-13/16") Length, 16mm (5/8") Diameter.

RG21	Satin Chrome	141
RG21/PC	Polished Chrome	
RG21/BR	Polished Brass	




MULTI-POSITION PANEL SUPPORT - SINGLE

- For panels up to 10mm (3/8") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 30mm (1-3/16") Length, 18mm (25/64") Diameter.

RG13	Satin Chrome	142
RG13/PC	Polished Chrome	
RG13/BR	Polished Brass	




MULTI-POSITION PANEL SUPPORT - DOUBLE


- For panels up to 10mm (3/8") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 46mm (1-13/16") Length, 18mm (25/64") Diameter.

RG23	Satin Chrome	143
RG23/PC	Polished Chrome	
RG23/BR	Polished Brass	



HARDWARE OPTIONS

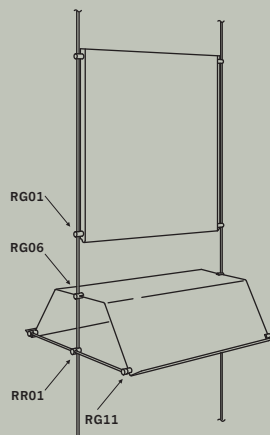

HARDWARE OPTIONS

- Use P01 base plate on page 32 with WM11 supports when mounting onto plaster board or for creating a design accent.

PRODUCT INFO:


For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

FINISH OPTIONS:

Standard finishes: Satin Chrome, Polished Chrome, Brass. Special finishes available on request.

Rod Display Systems

Panel Supports for 6.0mm Rods




SUPPORT FOR PANELS WITH HOLES - SINGLE

- To hold standard panels 7mm (1/4") thick.
- Hole size 6mm (15/64") Dia.
- Supports panels up to 20mm (3/4") thick are also available.

Size: 27mm (1-1/16") Length, 16mm (5/8") Diameter.

RS13	Satin Chrome	144
RS13/PC	Polished Chrome	
RS13/BR	Polished Brass	




SUPPORT FOR PANELS WITH HOLES - DOUBLE

- To hold standard panels 7mm (1/4") thick.
- Hole size 6mm (15/64") Dia.
- Supports panels up to 20mm (3/4") thick are also available.

Size: 42mm (1-21/32") Length, 16mm (5/8") Diameter.

RS23	Satin Chrome	145
RS23/PC	Polished Chrome	
RS23/BR	Polished Brass	




TOP PANEL SUPPORT

- For panels up to 7mm (1/4") thick.
- Supports signs and panels from above.

Size: 16mm (5/8") Length, 16mm (5/8") Diameter.

RG05	Satin Chrome	146
RG05/PC	Polished Chrome	
RG05/BR	Polished Brass	

* 12 lbs max. recommended weight.




HOOK - SINGLE

- For panels up to 3mm (1/8") thick with holes.

Size: 19mm (7/8") Length, 16mm (5/8") Diameter.

RH01	Satin Chrome	147
RH01/PC	Polished Chrome	
RH01/BR	Polished Brass	




HOOK - DOUBLE

- For panels up to 3mm (1/8") thick with holes.

Size: 24mm (15/16") Length, 16mm (5/8") Diameter.

RH02	Satin Chrome	148
RH02/PC	Polished Chrome	
RH02/BR	Polished Brass	




TOP/BOTTOM MULTI POSITION SUPPORT - SINGLE

- For panels up to 7mm (1/4") thick.
- Adjustable to any angle. Locks into position.
- For panels wider than the distance between rods.

Size: 33mm (1-17/64") Length, 16mm (5/8") Diameter.

RG12	Satin Chrome	149
RG12/PC	Polished Chrome	
RG12/BR	Polished Brass	



TOP/BOTTOM MULTI POSITION SUPPORT - DOUBLE

- For panels up to 7mm (1/4") thick.
- Adjustable to any angle. Locks into position.
- For panels wider than the distance between rods.




Size: 52mm (2-3/64") Length, 16mm (5/8") Diameter.

RG22	Satin Chrome	150
RG22/PC	Polished Chrome	
RG22/BR	Polished Brass	

INSTALLATION TIPS

Sign & Panel Supports

- Rod system allows a variety of mounting solutions for your posters - using various supports...



- Use RG05 for supporting signs from above.



ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.

HARDWARE OPTIONS:

RS13 & RS23 - For extra thick panels up to 20mm (3/4"), specify size required. For example: RS13/S/xx



Rod Display Systems

Shelf & Frame Supports for 6.0mm Rods

PICTURE HOOK - SINGLE

• For mounting framed artwork
Size: 30mm (1-3/16") Height, 18mm (45/64") Depth, 16mm (5/8") Diameter.


RS12	Satin Chrome	151
N/A	Polished Chrome	
N/A	Polished Brass	



PICTURE HOOK - DOUBLE

• For mounting framed artwork
Size: 30mm (1-3/16") Height, 25mm (63/64") Depth, 16mm (5/8") Diameter.

RS22	Satin Chrome	152
N/A	Polished Chrome	
N/A	Polished Brass	




SUPPORT FOR SHELVES WITH HOLES

• Locates under shelf.
• Shelf requires 10mm (3/8") diameter hole.
• Non-removable support.

Size: 8mm (1/3") Length, 16mm (5/8") Diameter.

RS01-3	Satin Chrome	153
RS01-3/PC	Polished Chrome	
RS01-3/BR	Polished Brass	




CLAMP SUPPORT FOR GLASS SHELVES - SINGLE

• For Glass or Acrylic Shelves up to 7mm (1/4") thick.
• No holes required.

Size: 25mm (1") Length, 16mm (5/8") Diameter.

RG06	Satin Chrome	154
RG06/PC	Polished Chrome	
RG06/BR	Polished Brass	




CLAMP SUPPORT FOR GLASS SHELVES - DOUBLE

• For Glass or Acrylic Shelves up to 7mm (1/4") thick.
• No holes required.

Size: 36mm (1-2/5") Length, 16mm (5/8") Diameter.

RG07	Satin Chrome	155
RG07/PC	Polished Chrome	
RG07/BR	Polished Brass	




MULTI-POSITION SHELF SUPPORT - SINGLE

• For shelves up to 7mm (1/4") thick.
• Adjustable to any angle. Can be locked into position.
• Holes not required.

Size: 30mm (1-3/16") Length, 16mm (5/8") Diameter.

RG11	Satin Chrome	156
RG11/PC	Polished Chrome	
RG11/BR	Polished Brass	





MULTI-POSITION SHELF SUPPORT - DOUBLE

• For shelves up to 7mm (1/4") thick.
• Adjustable to any angle. Can be locked into position.
• Holes not required.

Size: 46mm (1-13/16") Length, 16mm (5/8") Diameter.


RG21	Satin Chrome	157
RG21/PC	Polished Chrome	
RG21/BR	Polished Brass	

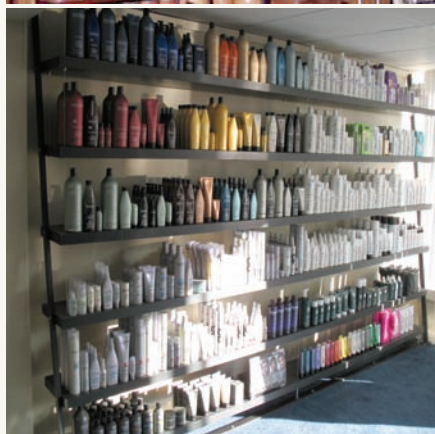

INSTALLATION TIP

Shelf Supports

- Rod system can support various types of shelves made of glass, acrylic, wood, metal, etc.

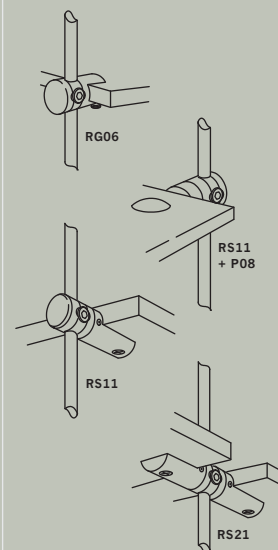

Chandris (Englan
Chandris (U.K.
Leathbond L
Celebrity Cruise Se
The Japan Foun
Celebrity Cruises (U

ORDERING TIP:


For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

FINISH OPTIONS:

Standard finishes: Satin Chrome, Polished Chrome, Brass. Special finishes available on request.

Rod Display Systems

Shelf Supports for 6.0mm Rods




MULTI-POSITION SHELF SUPPORT - SINGLE

- For shelves up to 10mm (3/8") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 30mm (1-3/16") Length, 18mm (25/64") Diameter.

RG13	Satin Chrome	158
RG13/PC	Polished Chrome	
RG13/BR	Polished Brass	




MULTI-POSITION SHELF SUPPORT - DOUBLE

- For shelves up to 10mm (3/8") thick.
- Adjustable to any angle. Can be locked into position.
- Holes not required.

Size: 46mm (1-13/16") Length, 18mm (11/16") Diameter.

RG23	Satin Chrome	159
RG23/PC	Polished Chrome	
RG23/BR	Polished Brass	




CLAMP SUPPORT FOR GLASS SHELVES - SINGLE

- For Glass or Acrylic Shelves up to 12.7mm (1/2") thick.
- No holes required.

Size: 29mm (1-1/8") Length, 21mm (53/64") Diameter.

RG15	Satin Chrome	160
RG15/PC	Polished Chrome	
RG15/BR	Polished Brass	




SUPPORT FOR WOODEN OR GLASS SHELVES - SINGLE

- Adjustable to any angle of slope.
- Can be locked into position.
- For glass shelves add ref. P08.

Size: 39mm (1-1/2") Length, 16mm (5/8") Diameter.

RS11	Satin Chrome	161
RS11/PC	Polished Chrome	
RS11/BR	Polished Brass	



SUPPORT FOR WOODEN OR GLASS SHELVES - DOUBLE

- Adjustable to any angle of slope.
- Can be locked into position.
- For glass shelves add ref. P08.

Size: 64mm (2-1/2") Length, 16mm (5/8") Diameter.

RS21	Satin Chrome	162
RS21/PC	Polished Chrome	
RS21/BR	Polished Brass	




SCREW TO RETAIN GLASS SHELVES

- Supported on RS11 or RS21 to hold 6mm (15/64") thick as standard.
- Flush Finish. Plastic insert to protect glass.

Size: 16mm Dia., 6mm Dia. Hole, 12mm from the edge of the glass.

P08	Satin Chrome	163
P08/PC	Polished Chrome	
P08/BR	Polished Brass	



SUPPORT FOR ROD - SINGLE

- For 6mm (15/64") Dia. Rod
- Rods will hold acrylic pockets, leaflet dispensers, banners & graphic presentations.


Size: 17mm (43/64") Length, 16mm (5/8") Diameter.

RS05	Satin Chrome	164
RS05/PC	Polished Chrome	
RS05/BR	Polished Brass	

DESIGN TIPS


Mix & Match

- add signs & graphic panels
- low voltage lighting
- glass shelving
- acrylic pockets...




HARDWARE OPTIONS


- Clamp supports for glass shelves... back and front attachment



- Clamp supports for glass shelves... side attachment



- Multi-position clamp supports... use for sloping shelves suspension



HARDWARE OPTIONS:

P08 - Flush finish. Plastic insert to protect glass. Hole 6mm (15/64") Dia., 6mm (15/64") thick glass, 12mm (15/32") from the edge of glass.

ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.


Rod Display Systems

Sundry Fittings/Rod & Rail Supports for 6.0mm Rods

SUPPORT FOR ROD - SINGLE

- For 6mm (15/64") Dia. Rod
 - Rods will hold acrylic pockets, leaflet dispensers, banners & graphic presentations.
- Size: 20mm (25/32") Length, 16mm (5/8") Diameter.


RS06	Satin Chrome	165
RS06/PC	Polished Chrome	
RS06/BR	Polished Brass	



SUPPORT FOR ROD - MULTI-POSITION

- For 6mm (15/64") Dia. Rod.
 - Adjustable to any angle.
 - Can be locked into position.
- Size: 31mm (1-7/32") Length, 16mm (5/8") Diameter.


RR01	Satin Chrome	166
RR01/PC	Polished Chrome	
RR01/BR	Polished Brass	



DECORATIVE END CUP FOR ROD

- For 6mm (15/64") Dia. Rod
- Size: 16mm (5/8") Length, 12mm (15/20") Diameter.


REC	Satin Chrome	167
REC/PC	Polished Chrome	
REC/BR	Polished Brass	



SUPPORT FOR SCREW FIX PANEL - SINGLE

- For any item fitted with boss ref. P02 (see below) or banner/hanging rail.
- Size: 18mm (45/64") Length, 12mm (15/32") Internal Diameter, 6mm (15/64") Internal Depth, 16mm (5/8") Diameter.


RS03	Satin Chrome	168
RS03/PC	Polished Chrome	
RS03/BR	Polished Brass	



SUPPORT FOR SCREW FIX PANEL - DOUBLE

- For any item fitted with boss ref. P02 (see below) or banner/hanging rail.
- Size: 21mm (53/64") Length, 12mm (15/32") Internal Diameter, 6mm (15/64") Internal Depth, 16mm (5/8") Diameter.

RS04	Satin Chrome	169
RS04/PC	Polished Chrome	
RS04/BR	Polished Brass	



BOSS FOR USE WITH SUPPORTS

- Ref. CS03 or CS04. Use with up to no. 10 countersunk wood screw or bolt.
- Size: 12mm (15/32") Diameter, 6mm (15/64") Depth.


P02	Nickel	170
------------	---------------	-----



HANGING / BANNER RAIL

- Heavy Duty - Ideal for garments and banners.
 - Polished chrome rails, supplied with supports to fit directly onto rods, no additional fittings required.
- Size: 25mm (1") & 19mm (3/4") Dia., 3 & 4 Feet Length


HR25R-3/PC	1" Dia., 3' Long	171
HR25R-4/PC	1" Dia., 4' Long	
BR19R-3/PC	3/4" Dia., 3' Long	
BR19R-4/PC	3/4" Dia., 4' Long	



INSTALLATION TIPS

Supports for Rod

- Use multi-position support RR01 to mount graphic panels or signs suspended from ceiling or projected from wall at any angle.



- Use RS03 & RS04 supports with 3/4" dia. banner rails or 1" dia. hanging rails.

HARDWARE OPTIONS:


Use P02 with any of supports RS03 or RS04. Fix it using up to no. 10 countersunk wood screw or bolt.

FINISH OPTIONS:

Standard finishes: Satin Chrome, Polished Chrome, Brass. Special finishes available on request.

Rod Display Systems

Installation Accessories for 6.0mm Rods



POWER CONNECTOR

- Allows electrical power to be connected to the rod. Excellent connection.

Size: 18mm (45/64") Length, 16mm (5/8") Diameter.

RS08	Satin Chrome	172
-------------	---------------------	-----



TOP ISOLATOR

- White nylon for rods.

Size: 16mm (5/8") Diameter.

PR01/I	White	173
---------------	--------------	-----



BOTTOM ISOLATOR

- 3 sections in white nylon.

SP/IS	White	174
--------------	--------------	-----



QUICK FIT TOGGLE

- Brass toggle that screws into the top end of a rod fitting.
- Unit fits directly into almost any make of channel.
- Invisible when used

PR01-Q	Brass	175
---------------	--------------	-----

* Not to be used with lighting.



TOGGLE

- For fixing rods to channels. Can be used with all top and bottom fittings.
- Allen key provided.

AT	Silver	176
AT/S	Silver	
AT/L	Silver	

* For fixing cable/rod fittings to channel order AT
* For fixing MSB brackets to channel order AT/S
* Long version AT/L for use with isolators.




DECORATIVE SUPPORT PLATE

- Add to any of the cable / rod systems fittings.

Size: 38mm (1-1/2") Diameter.

P01	Satin Chrome	177
P01/PC	Polished Chrome	
P01/BR	Polished Brass	



SINGLE WALL BRACKET


- Available in 3 sizes. All units can be fitted to the wall using up to no. 10 screws. Supplied with nut and bolt to connect rod to bracket.

MSB-25: 30mm (1-3/16") Height, 35mm (1-3/8") Depth, Cable Fixing: 25mm (63/64") from wall.
MSB: 60mm (2-23/64") Height, 60mm (2-23/64") Depth, Cable Fixing: 50mm (1-31/32") from wall.
MSB-100: 110mm (4-21/64") Height, 110mm (4-21/64") Depth, Cable Fixing: 100mm (3-15/16") from wall.


MSB-25	Silver	178
MSB	Silver	
MSB-100	Silver	

INSTALLATION TIPS


Low Voltage Lighting



Drop Ceiling



Plaster Ceiling



Concrete Ceiling



- Quick Fit Toggle fits directly into almost any make of channel with 1/4" to 3/8" opening.

ORDERING TIP:

The following details must be provided when ordering: product name, item number, and item finish code.

Rod Display Systems


Installation Accessories for 6.0mm Rods

TRIANGULAR WALL BRACKET

- Supplied with 2 nuts and bolts to connect cables to brackets.
- Supports 2 cables 300mm (11-7/8") apart.
- Hi-tech appearance.
- Can be used as a canopy of a sign support.

Size: 350mm (1'1-25/32") Height, 350mm (1'1-25/32") Depth, Cable project from the wall 40mm (1-37/64") and 340mm (1'1-25/64").

MDB	Silver	179
------------	---------------	-----



REBATE CHANNEL

- For ceiling or floor mounting. Cables or rods are fully moveable along the channel.
- For rebating into ceiling, floor, or shelves with a flush finish.

Size: 11.5mm (29/64") High; 19mm (7/8") Wide; 8.5mm (5/16") Channel Opening.

AC-10	Silver: 10 Feet	180
AC-8	Silver: 8 Feet	
AC-4	Silver: 4 Feet	

*AC-10 channel ships only in bulk via freight.



DOVETAIL CHANNEL

- For floor mounting. Cables or rods are fully moveable along the channel.
- Stylish appearance.

Size: 11.5mm (29/64") High; 28mm (1-7/64") Wide; 8.5mm (5/16") Channel Opening.

ACD-8	Silver: 8 Feet	181
ACD-4	Silver: 4 Feet	




DOUBLE SIDED CHANNEL (*PH1005)

- For wall mounting with MSB wall brackets and toggles.

Size: 19mm (7/8") Wide, 46mm (1-13/16") High.

ACL-8	Silver: 8 Feet	182
ACL-4	Silver: 4 Feet	



New Item

AGS-12	12" Width
AGS-24	24" Width
AGS-36	36" Width
AGS-40	40" Width
AGS-48	48" Width
AGS-60	60" Width

GOTCHA STRIPS

- Aluminum banner rails with clear plastic gripper strip. Ready to be used with cables or rods.

- Quick and easy way to suspend large posters. The clear plastic strips simply clip the poster into position, holding it firmly in place.




Miscellaneous / Set Screws

GRUB SCREWS FOR FITTINGS

- Spare grub screws for use with 6.0mm rod fittings.

P13G/S	M3 x 3mm
P12	M3 x 6mm
P11	M5 x 6mm
P16	M4 x 6mm
P18	M4 x 4mm




NYLON TIPPED SCREWS

- Protects glass and acrylic from damage.

P10	M6 x 10mm
------------	------------------



- Use single wall brackets to mount cables, rods or channels from wall or window frame...

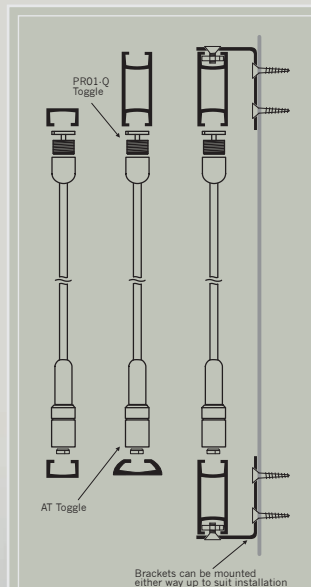

INSTALLATION TIPS Channel Assembly

- Use rebate channel for ceiling or floor assembly.
- Use the dovetail (threshold) channel for floor assembly only.
- Use double sided channel for wall assembly or for ceiling assembly with heavier loads.



PRODUCT INFO:

For more information on cable/rod display systems, including pricing, specifications, and installation instructions visit our website at www.novadisplay.com

FINISH OPTIONS:

Standard finishes: Satin Chrome, Polished Chrome, Brass. Special finishes available on request.

Ordering, Payment & Return Policies

Ordering Policy

To start your order first, carefully review the product and service information on our web site, if you don't see exactly what you want, please contact us regarding availability, size, and quantity requirements for your project. Make sure you have decided on exactly what you need. Then, consult us on all your questions regarding our products, components and parts, because many of components can be easily confused. Contact us to receive a quote for your project. After placing an order, the customer receives via fax or e-mail a Customer Order Acknowledgment, which indicates in detail descriptions of items and pricing. Orders will not be processed without Nova Display, Inc. receiving a signed copy of said Customer Order Acknowledgment. Make sure to review and initial all areas. All changes to your orders of stock merchandise can be modified no later then 24 hours after receiving your order. We will call or fax you immediately should something change concerning your order.

Sample Policy

Nova Display, Inc. will provide samples for your testing and inspection. Most samples are supplied at 40% discounted cost (plus UPS Charges). If you need to order components for a prototype or fabrication of a prototype, please contact us for a quotation.

Payment Policy

All orders are shipped F.O.B Nova Display. We accept Visa, or Master Card, in addition to Money Orders, Cashier's Checks and Business/Personal Checks. For orders by phone, you may pre-pay your order via check or wire transfer. Orders prepaid with a check will be shipped within 24 hours of check clearance. New customers wishing to prepay an order totaling \$5,000 or more must allow 10 business days for their check to clear. This policy applies to personal, business, cashiers, and certified checks, as well as money orders.

Overseas customers may pay by Credit Card or Bank T/T at the time of shipment. We do not charge your credit card for any item until it is shipped, this doesn't apply to customized and non-standard items. All credit card orders are subject to credit verification and approval. For your protection, credit card orders shipped to an address other than your billing address may require additional verification.

Qualified businesses or organizations will be given Net 30 terms upon approved credit. In order to open an account, please provide a bank reference and three trade references. Customers with established credit are expected to pay NET within specific terms of their account, pre-established credit limits, and our standard Terms and Conditions, otherwise the line of credit will be discontinued.

All Custom Orders require a 50% Deposit before start of fabrication. Remainder due prior to shipping unless other terms have been determined by Nova Display, Inc. Credit Department.

All pricing and specifications are subject to change, without prior notice. Freight, handling and insurance will be added to your order. Please call for current pricing and availability. Send payments to: Nova Display, Inc., 1626 Piner Road, Santa Rosa, CA 94503

We also suggest you to use our automated ordering system when placing an order, or buying our products online. We accept electronic check payments via PayPal. It also allows you to make payments using VISA / Master Card / American Express. If you don't want to use our secure ordering system or are having problems using it call us toll free: 800-753-9688.

Quality Policy

All merchandise is produced to standard and commercial tolerances. Nova Display, Inc. warranties product to be free from defects in workmanship and material. When Nova Display has determined that a product is defective, it will be replaced. Nova Display liability is limited to the cost of the defective product. No other warranty is expressed or implied.

Shipping Policy

90% of orders on finished products are shipped out within 2-15 business days from our sales/distribution center. The custom made products or components which are not available in stock at the moment of ordering will be shipped in 2-8 weeks. Most orders are shipped via UPS or FedEx, unless otherwise specified. We offer express air and economical two day air service on most items in stock. For large orders, we'll ship freight collect by the most reliable and inexpensive carrier to your location.

Return Policy

Inspect all your shipment immediately upon arrival. If your order is not received in satisfactory condition, keep all packaging and notify us within (3) days of receipt. Stock merchandise in original, unopened packaging may be returned for refund within fifteen (15) days of receipt. Items must be in their original state (undamaged). Shipping and handling charges for returned items are non-refundable. All returns must be accompanied by the order statement. You may want to insure your return. We cannot be responsible for lost or misdirected returns. If you paid for your order by credit card, a credit will be issued and will appear on your billing statement. Returns must be insured for the invoiced value of the merchandise. Please note that custom merchandise is not returnable. A 15%-30% restocking fee will be charged on all returns. If you have any questions, ask your salesperson for details. Merchandise must be returned to: Nova Display, Inc., 1626 Piner Road., Santa Rosa, CA 95403-1908



*"All you need to create
high impact displays..."*

Lobbies

Receptions

Showrooms

Windows

Corridors

Exhibitions

Museums

Galleries

Offices

Retail Outlets

Banks

Point-of-Sale

Airports

Shopping Malls

Sport Arenas

Hotels

Universities

Colleges