

# 1.5mm Cable Display Systems - INSTALLATION GUIDELINES






## WEIGHTED BOTTOM (CCT & CAT) - Cable Installation

**IMPORTANT:** It is essential to check that the top ceiling fixings are strong enough to take the weight of the items being displayed, whilst allowing for the tension in the cables.

- 1) Select the upper height at which cable is to start. Fix base fitting (A-B) to wall/ceiling, using a suitable fixing for the type of wall:
  - for wooden walls use a wood screw.
  - for a cavity wall use a spring toggle bolt.
  - for a solid wall use a rawlplug and screw.
- 2) Loosen the grub screws in fitting (E), using the allen key provided and slide fittings (E), weight (D) up the cable.
- 3) Pull down the cable and cut off at desire lenght.
- 4) Re-tighten fittings (E) on the end of the cable.

**N.B.** It is important to check the strength of the top fixing. No responsibility will be taken for incorrect fixing. This responsibility rests with the installer.

Cables are not supplied with fixing screws.

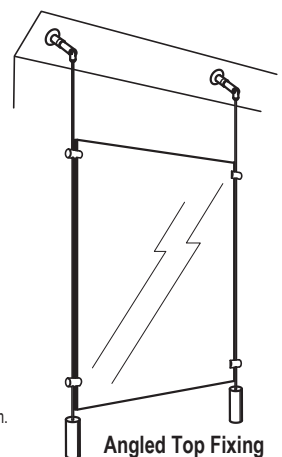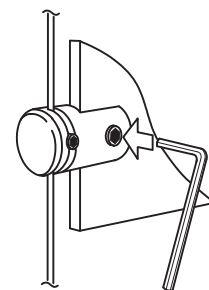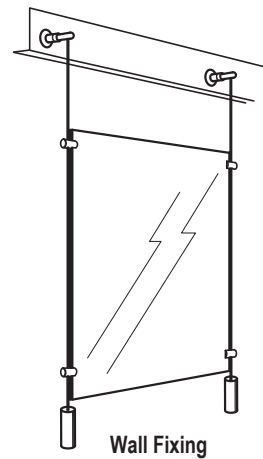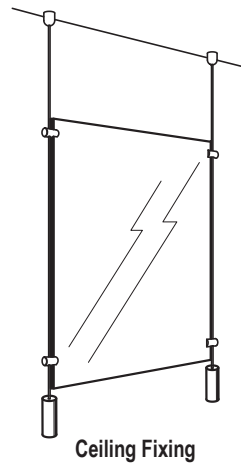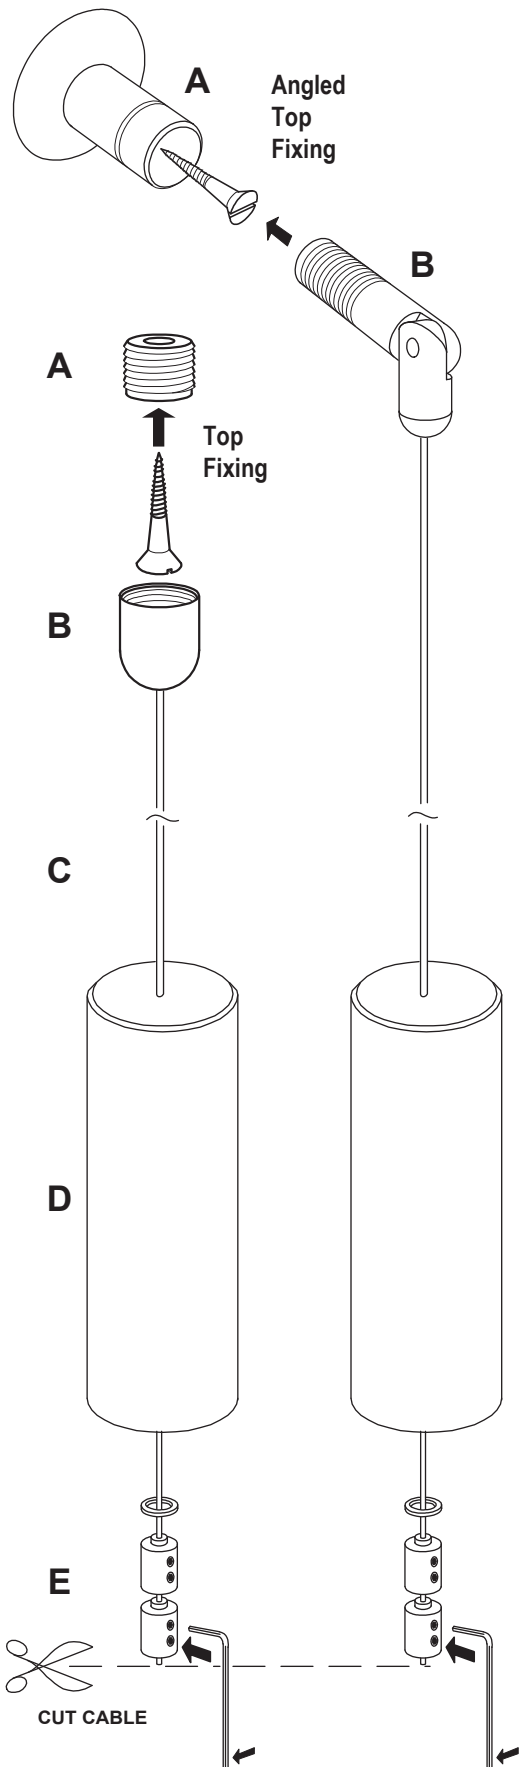

Graphic/art panels, posters, mirrors, etc. - suspended using cables suspensions system. It can be fixed direct to the wall, ceiling, channel, or angled surfaces.

